



QualityFlex Select flex lighting 100 mm, CRI > 90, 4,8 W / m, IP00
Artikel-Nr. 75201009

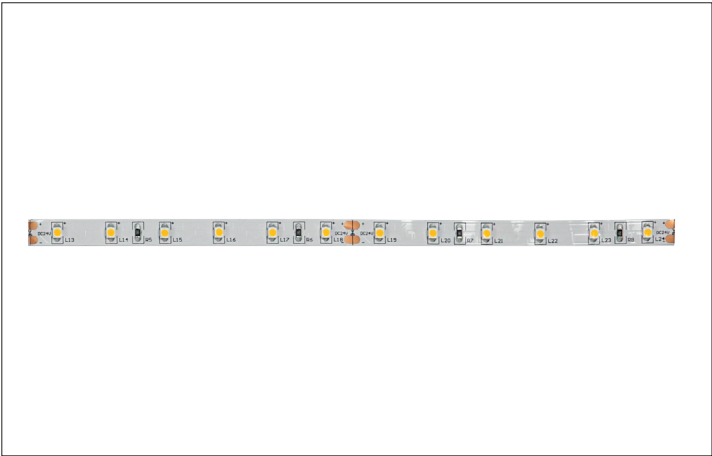

QualityFlex Select flex lighting 100 mm, CRI > 90, 4,8 W / m, IP00, orange. LED flex lighting for decorative, technical as well as efficient lighting of light coves, linear applications and backlighting, basic or general lighting of rooms, architectural applications and for areas where high illumination is required, such as indirect or direct lighting, luminous ceilings, gastronomy lighting and much more. Länge: 100.0 mm Lampenleistung je Meter: 4.8 W/m, Lichtstrom je Meter: 110.0 lm/m, Schutzart raumseitig: IP00, Schutzklasse: III, Spannung: 24V DC, Abstrahlwinkel: 120.0 °, 60 LEDs pro Meter, Chip-Abstand (Short Pitch) : 16,7mm. Zur Individuellen Anwendung kann die LED-Flexplatine alle 100 mm eingekürzt werden. Die maximale Systemlänge von 5.000mm darf mit einer Einspeisung nicht überschritten werden. This luminaire contains incorporated and non-exchangeable LED light sources.

Artikel-Nr.		75201009	
Stand:		06.12.2021 12:10	
Colour temperature	amber	Voltage	24V
Colour	Orange	Degree of protection	IP00
Length	100 mm	Protection class	III
Beam angle	120 °	Length	100 mm
Amount of light sources / fittings	6 Qty	Width	8 mm
Lamp	LED	Aufbauhöhe	1.4 mm
scope of delivery	Including connecting cable on one side, length 350 mm	Circuit type	Parallel conduction