



QualityFlex Special Applications, RGBW, 17 W / m, IP67
Artikel-Nr. 18573002

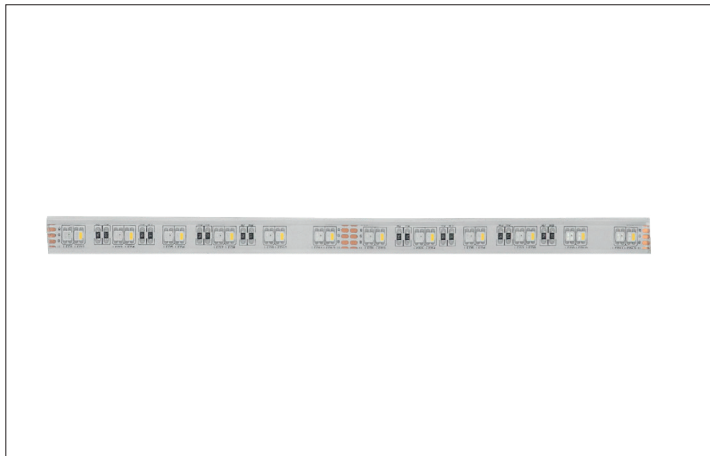

QualityFlex Special Applications, RGBW, 17 W / m, IP67, rgbw. LED flex lighting for decorative, technical as well as efficient lighting of light coves, linear applications and backlighting, basic or general lighting of rooms, architectural applications and for areas where high illumination is required, such as indirect or direct lighting, luminous ceilings, gastronomy lighting and much more. Länge: 5000.0 mm Lampenleistung je Meter: 17.0 W/m, Lichtstrom je Meter: 290.0 lm/m, Schutzart raumseitig: IP67, Schutzklasse: III, Spannung: 24V DC, Abstrahlwinkel: 120.0 °, 120 LEDs pro Meter, Chip-Abstand (Short Pitch) : 16,7mm. Zur Individuellen Anwendung kann die LED-Flexplatine alle 100 mm eingekürzt werden. Bei Kürzung der LED-Flexplatine muss der IP-Schutz bauseits wiederhergestellt werden. Die maximale Systemlänge von 5.000mm darf mit einer Einspeisung nicht überschritten werden. Diese Leuchte enthält eingebaute LED-Lampen. Die Lampen können in der Leuchte nicht ausgetauscht werden.

Artikel-Nr.	18573002
Stand:	06.12.2021 11:57

Colour temperature	RGBW
Light colour	RGBW
Luminous flux per meter	290 lm/m
Power	96 W
Lamp power per meter	17 W/m
Power fix	85 W
Beam angle	120 °
Length	5,000 mm
Width	12 mm
Aufbauhöhe	5 mm
Length of individual sections	100 mm

Degree of protection	IP67
Protection class	III
Short Pitch	16.7 mm
Number of lamps per meter	120 Qty
Voltage	24V
Voltage type	DC
Ambient temperature	-10 °C bis +40 °C
Control	Dimming depending on driver
Circuit type	Parallel conduction
Length of the connection line	350 mm
Maximum module length	5,000 mm