



QualityFlex Special Applications, TunableWhite, 19,2 W / m, IP60
Artikel-Nr. 15226004

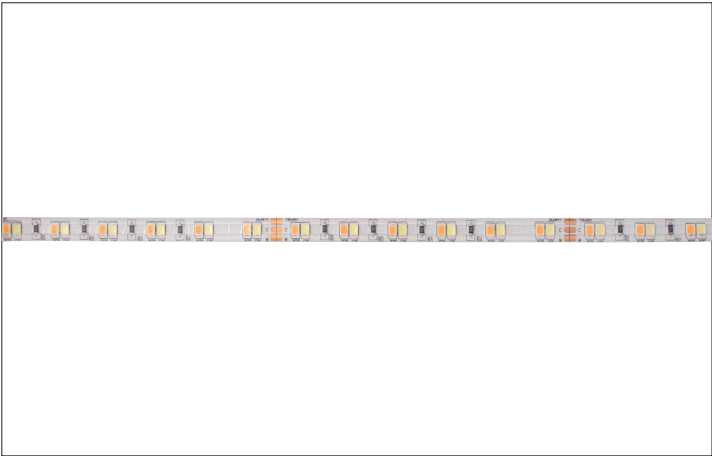

QualityFlex Special Applications, TunableWhite, 19,2 W / m, IP60, tunablewhite, 6.500K-2.000K, CRI > 90. LED flex lighting for decorative, technical as well as efficient lighting of light coves, linear applications and backlighting, basic or general lighting of rooms, architectural applications and for areas where high illumination is required, such as indirect or direct lighting, luminous ceilings, gastronomy lighting and much more. Länge: 5000.0 mm Lampenleistung je Meter: 19.2 W/m, Lichtstrom je Meter: 870.0 lm/m, Schutzart raumseitig: IP60, Schutzklasse: III, Spannung: 24V DC, Abstrahlwinkel: 120.0 °, 120 LEDs pro Meter, Chip-Abstand (Short Pitch) : 16,7mm. Zur Individuellen Anwendung kann die LED-Flexplatine alle 100 mm eingekürzt werden. Bei Kürzung der LED-Flexplatine muss der IP-Schutz bauseits wiederhergestellt werden. Die maximale Systemlänge von 5.000mm darf mit einer Einspeisung nicht überschritten werden.

Artikel-Nr.	15226004
Stand:	06.12.2021 11:47

Colour temperature	2000 - 6500 K
Luminous flux per meter	870 lm/m
Lamp power per meter	19.2 W/m
Beam angle	120 °
Length	5,000 mm
Width	10 mm
Aufbauhöhe	4 mm
Length of individual sections	100 mm
Degree of protection	IP60
Protection class	III

McAdam-Step	McAdam-Step 3
Short Pitch	16.7 mm
Number of lamps per meter	120 Qty
Voltage	24V
Voltage type	DC
Ambient temperature	-10 °C bis +40 °C
Control	Dimming depending on driver
Length of the connection line	350 mm
Colour rendering	CRI > 90
Maximum module length	5,000 mm