
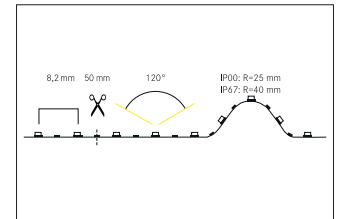


QualityFlex Special Applications, RGB, 14,4 W / m, IP00
Artikel-Nr. 15209001

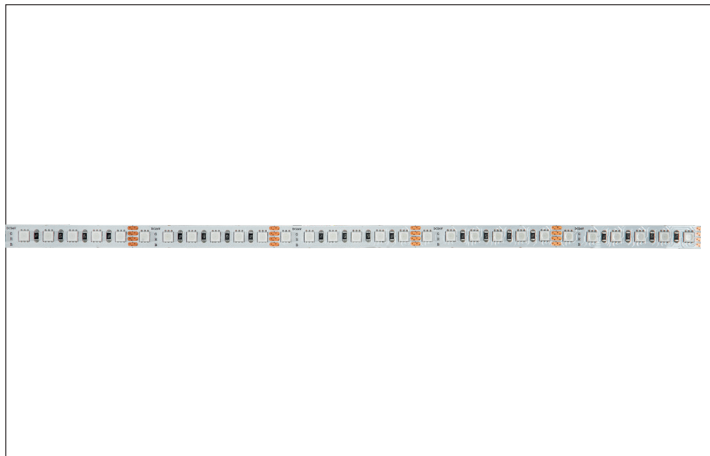

| | |
|--------------------|------------------|
| Artikel-Nr. | 15209001 |
| Stand: | 06.12.2021 12:34 |

| | |
|-------------------------------|----------|
| Lamp power per meter | 14.4 W/m |
| Beam angle | 120 ° |
| Length | 5,000 mm |
| Width | 8 mm |
| Aufbauhöhe | 2 mm |
| Length of individual sections | 50 mm |
| Degree of protection | IP00 |
| Protection class | III |
| Short Pitch | 8.2 mm |

| | |
|-------------------------------|-----------------------------|
| Number of lamps per meter | 120 Qty |
| Voltage | 24V |
| Voltage type | DC |
| Ambient temperature | -10 °C bis +40 °C |
| Control | Dimming depending on driver |
| Circuit type | Parallel conduction |
| Length of the connection line | 350 mm |
| Maximum module length | 5,000 mm |