



LED converter 350 mA, trailing-edge phase dimmable

Artikel-Nr. 17664010

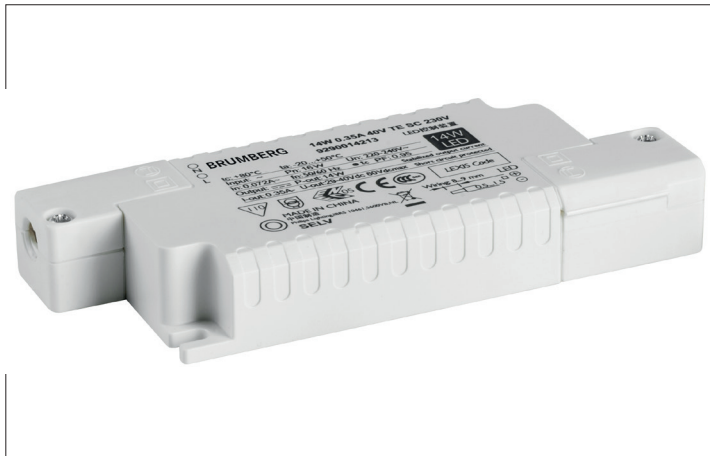

LED converter 350 mA, trailing-edge phase dimmable, This converter is equipped with safety devices which protect it against overvoltage, short-circuit as well as thermal and electric overloads. The input and output terminals are suitable for cables with a cross-section of up to 1.5 mm². Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Current: 350 mA, Voltage: 230V AC 50Hz, Power: 14W, dimmable: Yes, Control: Trailing-edge phase.

Artikel-Nr.	17664010
Stand:	06.12.2021 15:39

version	ohne
Power	10,15-14 W
Current	350 mA
Starting current	
Width	51 mm
Length	125 mm
Aufbauhöhe	20 mm
Control	Trailing-edge phase
Material	Plastic
Environment temperature (ta)	0°C up to 40°C
Measure point (tc)	max. +80 °C
Power	10,15-14 W
Dimensions	L 125 x B 51 x H 20 mm

Input voltage	AC: 220-240 V
scope of delivery	Plug&Play version with 110 mm P&P output cable
Voltage	230V AC 50Hz
Current	350 mA
Circuit type	Series conduction
Degree of protection	IP20
Protection class	II
frequency	50 Hz
Length	125 mm
Width	51 mm
Aufbauhöhe	20 mm