



LED recessed downlight, IP54
Artikel-Nr. 12270174

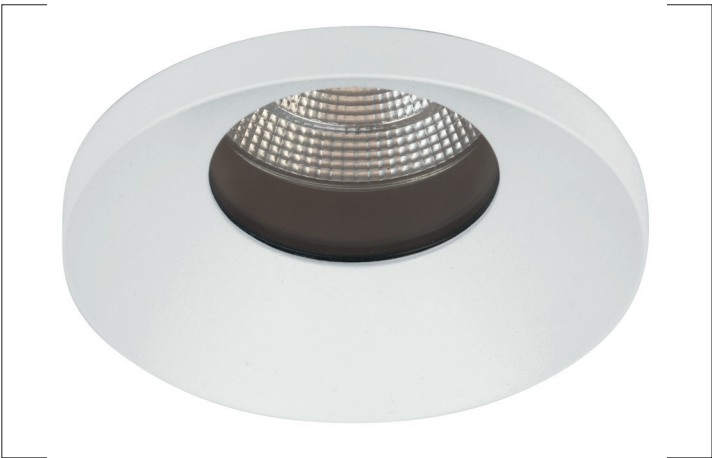

LED recessed downlight, IP54, white, round. In a compact design, for installation in tool-less rapid assembly systems Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Glass, Degree of protection: according to DIN EN 60529 IP54*, Protection class: (EN 61140) III, Current: 500 mA, Power: 9.2W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 840lm, Colour temperature: 4.000 K, Light colour : White, Beam angle: 33°, Adjustability: Not adjustable, With control gear: No, Control: Dimming depending on driver.

Artikel-Nr.	12270174		
Stand:	26.10.2021 03:26		
Colour temperature	4000 K	Outer diameter	83 mm
Colour	White	Built-in diameter	68 mm
Beam angle	38 °	Installation depth	68 mm
Amount of light sources / fittings	1 Qty	Current	500 mA
Material	Aluminium / Glass	Degree of protection	IP54*
Power	9,2 W	Protection class	III
Lamp	LED	Adjustability	Not adjustable
Colour rendering	CRI > 80	Circuit type	Series conduction
Control	Dimming depending on driver		