





LEAWY LED light point, IP65
Article no. 12053183

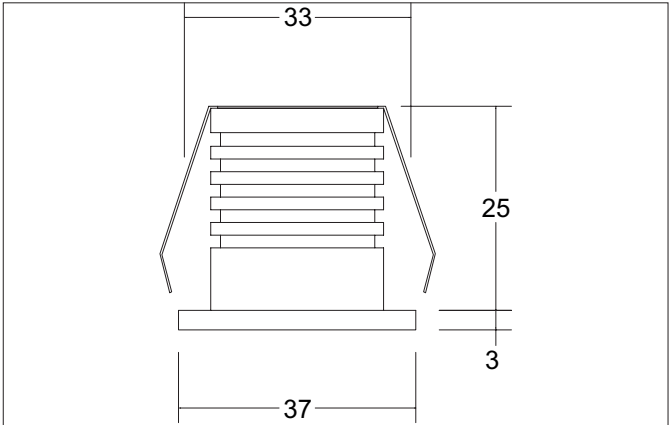

Tender	
LED light point, IP65, black structure, Round. In a compact design, for installation in tool-less rapid assembly systems. Lamp holder: Plug&Play, Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Plastic, Degree of protection: (DIN EN 60529) IP65, Protection class: (DIN EN 61140) III, Power: 3 W, Amount of light sources / fittings: 1 piece, Luminous flux: 120 lm, Colour temperature: 3.000 K, Light colour: white, Beam angle: 45°, Adjustability: Not adjustable, without control gear, Dimmable: Depending on type of control gear, Type of dimming: Depending on driver.	

Article data	
Article no.	12053183
GTIN	4251433908302
Series name	LEAWY
Short description	LED light point, IP65
Material	Aluminium / Plastic
Colour	black structure
Type of surface	Structure
Shape	Round
Outer diameter	37 mm
Built-in diameter min.	33 mm
Built-in diameter max.	33 mm
Installation depth	37 mm
Height	3 mm
Weight	0.061 kg
D licence plate	No
Conformance	CE, UKCA


LEAWY LED light point, IP65

Article no. 12053183

Lighting technology	
Colour temperature	3.000 K
Light colour	white
Light output	Direct
Luminous flux	120 lm
Colour rendering	CRI > 80
Reflector	Without
Beam angle	45°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	3 W
Voltage type	DC
Current	700 mA
Lamp	LED
Lamp holder	Plug&Play
Protection class	III
Protection class on the ceiling side	IP20
Degree of protection	IP65
Dimmable	Depending on type of control gear
Control	Depending on driver
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Energy efficiency class	not required

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Further references	No cover with thermal insulation material
Cover	Glass transparent

Packing data	
Gross weight	0.084 kg
Length of packaging	65 mm
Packaging width	55 mm
Packaging height	65 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.


LEAWY LED light point, IP65

Article no. 12053183

Required accessories

Article no.: 17723000

LED converter 700 mA, on/off switchable

Power: 1,4 - 31 W, Plug&Play

Dimensions: 146.5 mm x 43.5 mm x 30 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17723000_2021_DE.pdf

Article no.: 17723020

LED converter 700 mA, on/off switchable

Power: 1,4 - 31 W, Plug&Play + Anschlussbox

Dimensions: 146.5 mm x 43.5 mm x 30 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17723020_2021_DE.pdf

Article no.: 17748000

LED converter 700 mA, trailing-edge phase dimmable

Power: 1,4 - 32 W, Plug&Play

Dimensions: 166 mm x 46 mm x 34 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17748000_2021_DE.pdf

Article no.: 17748020

LED converter 700 mA, trailing-edge phase dimmable

Power: 1,4 - 32 W, Plug&Play + Anschlussbox

Dimensions: 166 mm x 46 mm x 34 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17748020_2021_DE.pdf

Article no.: 17767000

LED converter 700 mA, 1-10 V dimmable (analog)

Power: 2,1 - 20 W, Plug&Play

Dimensions: 110.5 mm x 52 mm x 22 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17767000_2021_DE.pdf

Article no.: 17767020

LED converter 700 mA, 1-10 V dimmable (analog)

Power: 2,1 - 20 W, Plug&Play + Anschlussbox

Dimensions: 110.5 mm x 52 mm x 22 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17767020_2021_DE.pdf

Article no.: 17783000

LED converter 700 mA, DALI dimmable, (digital)

Power: 2,1 - 20 W, Plug&Play

Dimensions: 110.5 mm x 52 mm x 22 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17783000_2021_DE.pdf

Article no.: 17783020

LED converter 700 mA, DALI dimmable, (digital)

Power: 2,1 - 20 W, Plug&Play + Anschlussbox

Dimensions: 110.5 mm x 52 mm x 22 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17783020_2021_DE.pdf



LEAWY LED light point, IP65
Article no. 12053183

Optional accessories
Article no.: 3838 Plug&Play extension cable 700 mA Dimensions: 500 mm https://www.brumberg.com/fileadmin/products/Datenblatt_00003838_2021_DE.pdf
Article no.: 3839 Plug&Play extension cable 700 mA Dimensions: 1,000 mm https://www.brumberg.com/fileadmin/products/Datenblatt_00003839_2021_DE.pdf
Article no.: 3840 Plug&Play extension cable 700 mA Dimensions: 2,000 mm https://www.brumberg.com/fileadmin/products/Datenblatt_00003840_2021_DE.pdf