
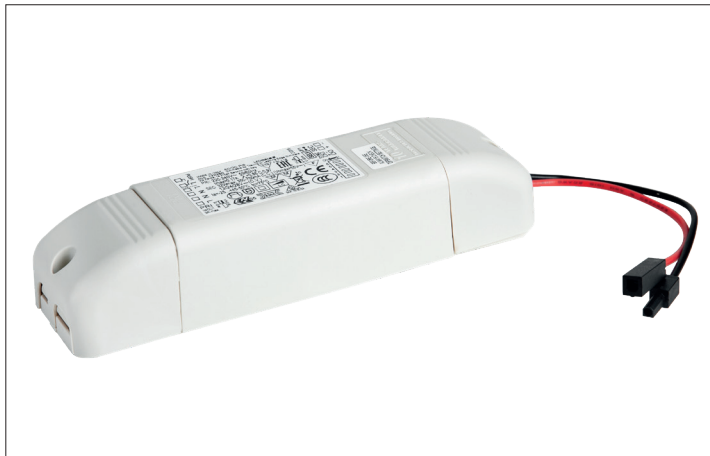


LED converter 350 mA, trailing-edge phase dimmable

Artikel-Nr. 17648020

LED converter 350 mA, trailing-edge phase dimmable, This driver fulfills the requirements for safety lighting systems in accordance with DIN EN 50172 VDE 0108-100:2005-01. This converter is equipped with safety devices which protect it against overvoltage, short-circuit as well as thermal and electric overloads. The input and output terminals are suitable for cables with a cross-section of up to 1.5 mm². . Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Current: 350 mA, Voltage: 230V AC 50Hz, Power: 17W, Control: Trailing-edge phase.

Artikel-Nr.	17648020
Stand:	06.12.2021 10:30
version	Plug&Play + Anschlussbox
Power	0,7-17 W
Current	350 mA
Control	Trailing-edge phase
Material	Plastic
Enviroment temprature (ta)	-25 °C bis +50 °C
Measure point (tc)	max. +75 °C
Power	0,7-17 W
Dimensions	L 166 x B 46 x H 34 mm
Input voltage	AC: 220-240 V
scope of delivery	Plug&Play version with 110 mm P&P output cable