



LED converter 700 mA, DALI dimmable, (digital)

Artikel-Nr. 17783020

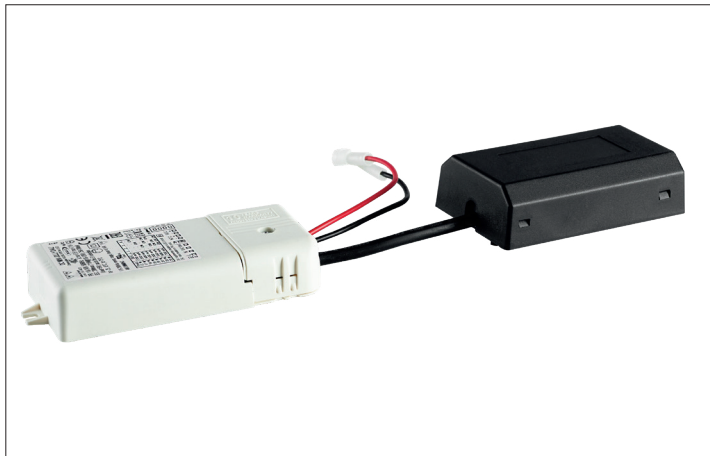

LED converter 700 mA, DALI dimmable, (digital), This converter is equipped with safety devices which protect it against over-voltage, short-circuit as well as thermal and electric overloads. The input and output terminals are suitable for cables with a cross-section of up to 0.75-1.5 mm². Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Current: 700 mA, Voltage: 230V AC 50Hz , Power: 20W, Control: DALI-2 .

Artikel-Nr.	17783020
Stand:	06.12.2021 10:21

version	Plug&Play + Anschlussbox
Power	2,1-20 W
Current	700 mA
Control	DALI-2
Material	Plastic
Enviroment temprature (ta)	-25 °C bis +45 °C
Measure point (tc)	max. +75 °C
Power	2,1 - 20 W
Dimensions	L 110,5 x B 52 x H 22 mm
Input voltage	AC: 110-240 V, DC: 176 - 280 V

scope of delivery	Plug&Play version with 110 mm P&P output cable
Voltage	230V AC 50Hz
Current	700 mA
Circuit type	Series conduction
Degree of protection	IP20
Protection class	II
Voltage type	DC
Length	110.5 mm
Width	52 mm
Aufbauhöhe	22 mm