
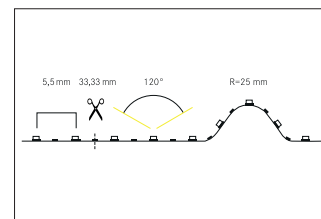


QualityFlex Special Applications, Food, 14,4 W / m, IP00

Artikel-Nr. 88203040

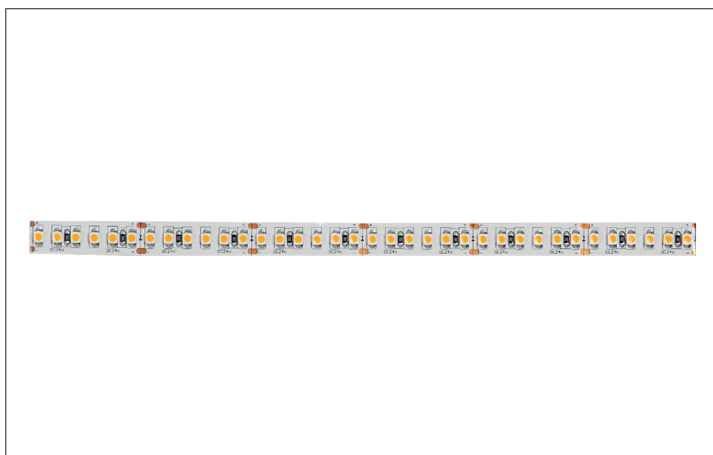

QualityFlex Special Applications, Food, 14,4 W / m, IP00, white, 4.050K, CRI > 85. LED flex lighting for decorative, technical as well as efficient lighting of light coves, linear applications and backlighting, basic or general lighting of rooms, architectural applications and for areas where high illumination is required, such as indirect or direct lighting, luminous ceilings, gastronomy lighting and much more. Länge: 33.33 mm Lampenleistung je Meter: 14.4 W/m, Lichtstrom je Meter: 1350.0 lm/m, Schutzart raumseitig: IP00, Schutzklasse: III, Spannung: 24V DC, Abstrahlwinkel: 120.0 °, 180 LEDs pro Meter, Chip-Abstand (Short Pitch) : 5,55mm. Zur Individuellen Anwendung kann die LED-Flexplatine alle 33,33 mm eingekürzt werden. Die maximale Systemlänge von 5.000mm darf mit einer Einspeisung nicht überschritten werden.

Artikel-Nr.	88203040
Stand:	06.12.2021 17:26

Colour temperature	4050 K
Colour	White
Length	33.3 mm
Beam angle	120 °
Amount of light sources / fittings	900 Qty
Power	72 W
Lamp	LED
scope of delivery	inkl. 1 x Montageanleitung, 5 x Kennzeichnungsetiketten

Control	Dimming depending on driver
Voltage	24V
Degree of protection	IP00
Protection class	III
Length	5,000 mm
Width	10 mm
Aufbauhöhe	2.4 mm
Circuit type	Parallel conduction