





LED recessed spot
Artikel-Nr. 12251633

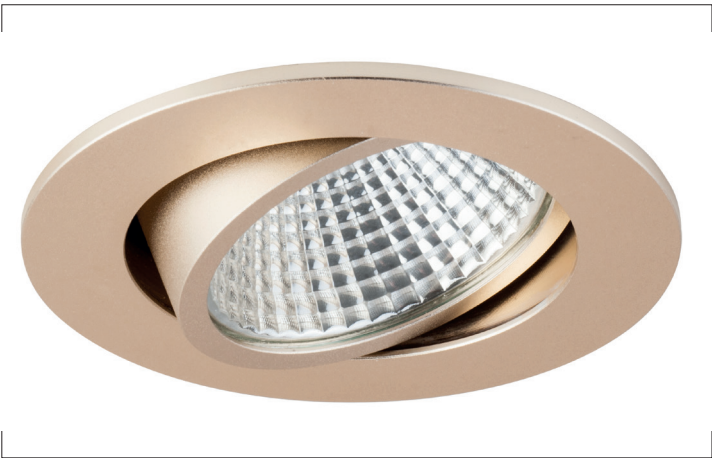

LED recessed spot, champagne, round. In a compact design, for installation in tool-less rapid assembly systemsLamp holder: Plug&Play, Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Glass, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) III, Current: 350 mA, Power: 3W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 290lm, Colour temperature: 2700 K, Light colour : White, Beam angle: 38°, Adjustability: Pivoted, With control gear: No, control: Dimming depending on driver. This luminaire contains incorporated and non-exchangeable LED light sources.

Artikel-Nr.	12251633
Stand:	19.07.2021 11:24

Colour of light	2700 K	Outer diameter	82 mm
Colour	Champagne	Built-in diameter	68 mm
Beam angle	38 °	Installation depth	40 mm
Amount of light sources / fittings	1 Qty	Current	350 mA
Material	Aluminium / Glass	Luminous flux	290 lm
Lamp holder	Plug&Play	Degree of protection	IP20
Power	3 W	Protection class	III
Lamp	LED	Adjustability	Pivoted
Colour rendering	CRI > 80	Swivel angle	30 °
control	Dimming depending on driver	Circuit type	Series conduction