



LED recessed spot
Artikel-Nr. 12371633

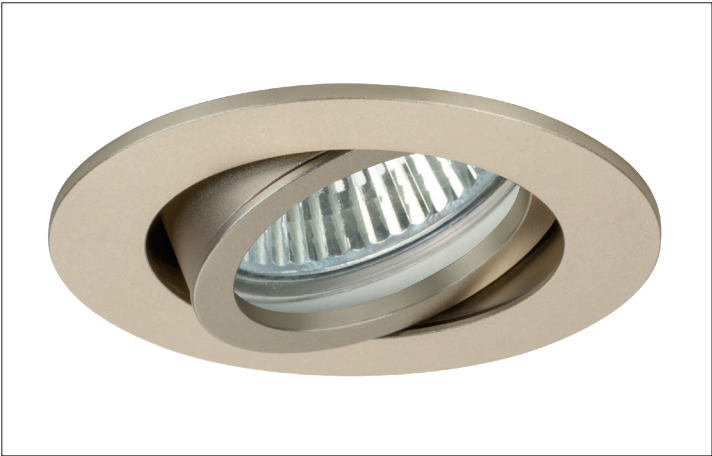

LED recessed spot, champagne, round. In a compact design, for installation in tool-less rapid assembly systemsLamp holder: Plug&Play, Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Glass, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) III, Current: 350 mA, Power: 3W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 290lm, Colour temperature: 2.700 K, Light colour : White, Beam angle: 38°, Adjustability: Pivoted, With control gear: No, Control: Dimming depending on driver.

Artikel-Nr.	12371633
Stand:	26.10.2021 03:28
Colour temperature	2700 K
Colour	Champagne
Beam angle	38 °
Amount of light sources / fittings	1 Qty
Material	Aluminium / Glass
Lamp holder	Plug&Play
Power	3 W
Lamp	LED
Colour rendering	CRI > 80
Control	Dimming depending on driver
Outer diameter	82 mm
Built-in diameter	68 mm
Installation depth	50 mm
Current	350 mA
Degree of protection	IP20
Protection class	III
Circlip	Without circlip
Adjustability	Pivoted
Swivel angle	20 °
Circuit type	Series conduction