


LED recessed spot QUBIC

**Artikel-Nr. 13127173**

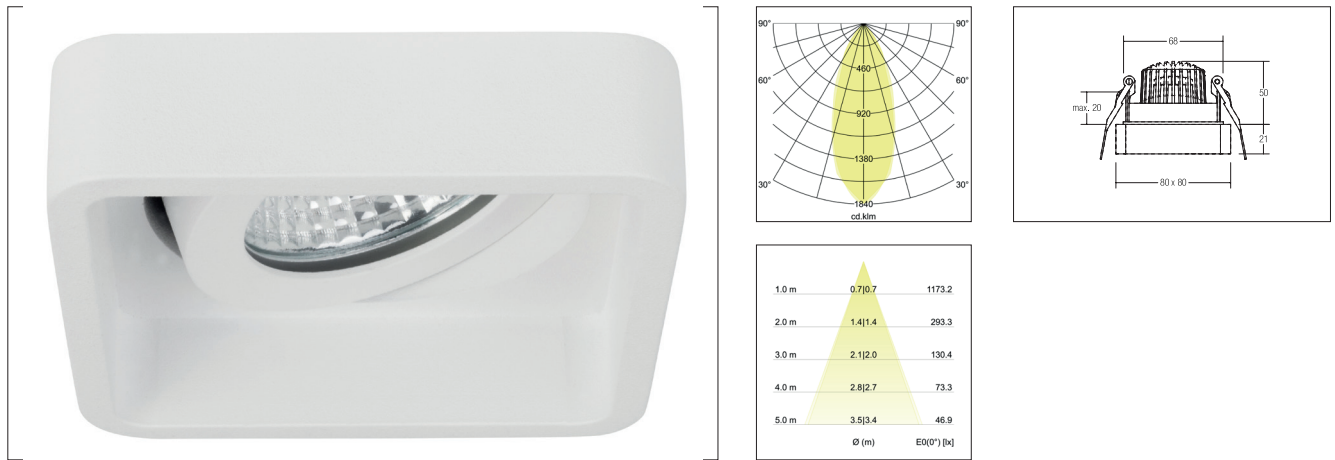

LED recessed spot QUBIC, white, square. In a compact design, for installation in tool-less rapid assembly systems Lamp holder: Plug&Play, Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Glass, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) III, Current: 350 mA, Power: 6W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 680lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 38°, Adjustability: Pivoted, With control gear: No, Control: Dimming depending on driver.

|                    |                  |
|--------------------|------------------|
| <b>Artikel-Nr.</b> | <b>13127173</b>  |
| <b>Stand:</b>      | 26.10.2021 02:12 |

|                                    |                             |
|------------------------------------|-----------------------------|
| Colour temperature                 | 3000 K                      |
| Colour                             | White                       |
| Length                             | 80 mm                       |
| Beam angle                         | 38 °                        |
| Amount of light sources / fittings | 1 Qty                       |
| Material                           | Aluminium / Glass           |
| Lamp holder                        | Plug&Play                   |
| Power                              | 6 W                         |
| Lamp                               | LED                         |
| Colour rendering                   | CRI > 80                    |
| Control                            | Dimming depending on driver |
| Built-in diameter                  | 68 mm                       |

|                      |                   |
|----------------------|-------------------|
| Installation depth   | 50 mm             |
| Current              | 350 mA            |
| Degree of protection | IP20              |
| Protection class     | III               |
| Circlip              | Without circlip   |
| Adjustability        | Pivoted           |
| Length               | 80 mm             |
| Width                | 80 mm             |
| Aufbauhöhe           | 20 mm             |
| Swivel angle         | 25 °              |
| Circuit type         | Series conduction |