



LED recessed spot set, on/off  
**Artikel-Nr. 38309253**

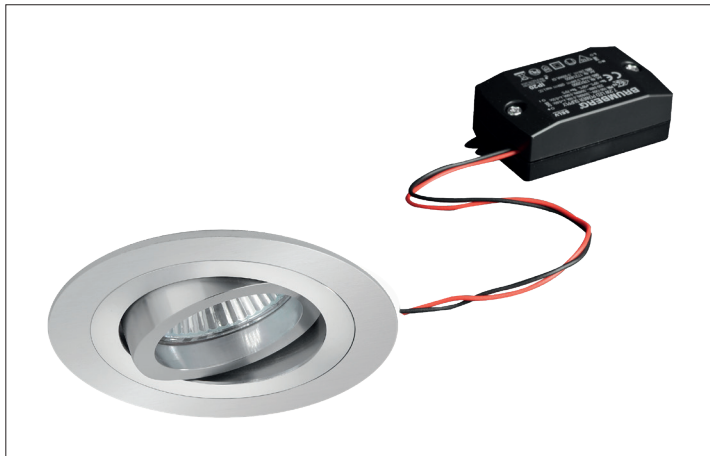

1.0 m	0.7 0.7	1173.2
2.0 m	1.4 1.4	283.3
3.0 m	2.1 2.0	130.4
4.0 m	2.8 2.7	73.3
5.0 m	3.5 3.4	46.9
	Ø (m)	E0(0°) [lx]

LED recessed spot set, on/off, alu, round. In a compact design, for installation in tool-less rapid assembly systems. Set including a converter for 230-V mains voltage, on/off switchable, dimensions of converter: L 68 x W 35 x H 21 mm . Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Glass / Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 6W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 680lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 38°, Adjustability: Pivoted, With control gear: Yes, Control: on/off.

<b>Artikel-Nr.</b>	<b>38309253</b>
<b>Stand:</b>	26.10.2021 03:15

Colour temperature	3000 K
Colour	Alu
Beam angle	38 °
Amount of light sources / fittings	1 Qty
Material	Aluminium / Glass / Plastic
Power	6 W
Lamp	LED
Colour rendering	CRI > 80
Control	on/off
Outer diameter	93 mm

Built-in diameter	75 mm
Installation depth	50 mm
Voltage	230V AC 50Hz
Degree of protection	IP20
Protection class	II
Circlip	Without circlip
Adjustability	Pivoted
Swivel angle	30 °
Circuit type	Parallel conduction