

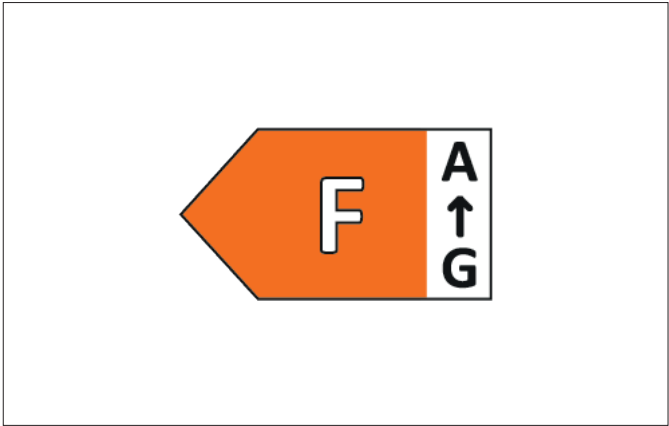


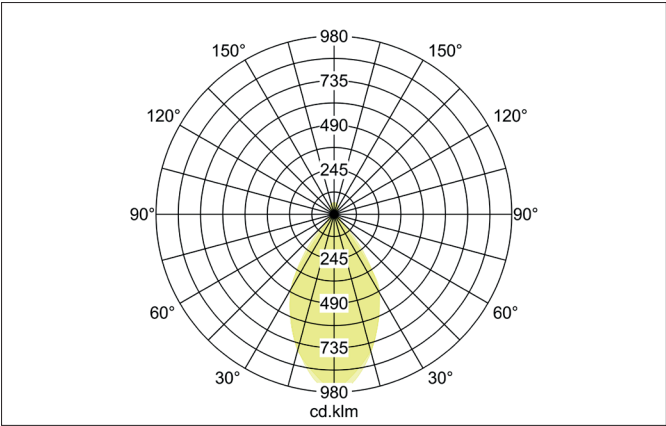

QUBIC Surface-mounted LED ceiling downlight, with indirect component, switchable
Article no. 12040173

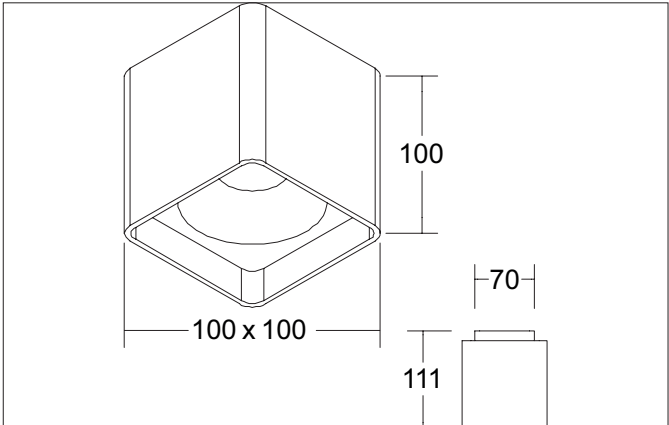

Tender
Surface-mounted LED ceiling downlight, with indirect component, switchable, Square. Luminaire length 111.0 mm, Luminaire width 100.0 mm, Height 100.0 mm Weight 0.968 kg, Reflector silver with rotationssymmetrical, deep, wide distributed light intensity. Cover glass transparent Luminous flux 1.130 lm, Power 1 x 14,5 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 90, Housing material: Aluminium / Plastic, Colour: white structure, Permissible ambient temperature (ta): -20 °C up to +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP20. With electronic driver, on/off switchable.

Article data	
Article no.	12040173
GTIN	4250047798606
Series name	QUBIC
Short description	Surface-mounted LED ceiling downlight, with indirect component, switchable
Material	Aluminium / Plastic
Colour	white structure
Type of surface	Structure
Shape	Square
Length	111 mm
Width	100 mm
Hight	100 mm
Scope of delivery	incl. converter for connection to 230 V mains voltage, switchable
Weight	0.968 kg
D licence plate	No
Conformance	CE, UKCA


QUBIC Surface-mounted LED ceiling downlight, with indirect component, switchable

Article no. 12040173

Lighting technology	
Colour temperature	3.000 K
Light colour	white
Light output	Direct/Indirect
Luminous flux	1,130 lm
System efficiency	78 lm/W
Colour rendering	CRI > 90
Reflector	Other
Reflector colour	silver
Beam angle	60°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	14.5 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	I
Degree of protection	IP20
Dimmable	No
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Energy efficiency class	F

Mounting technology	
Mounting method	Surface mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Cover	Glass transparent

Packing data	
Gross weight	1.115 kg
Length of packaging	150 mm
Packaging width	120 mm
Packaging height	160 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.