


LED recessed downlight BOWL
Artikel-Nr. 12530074

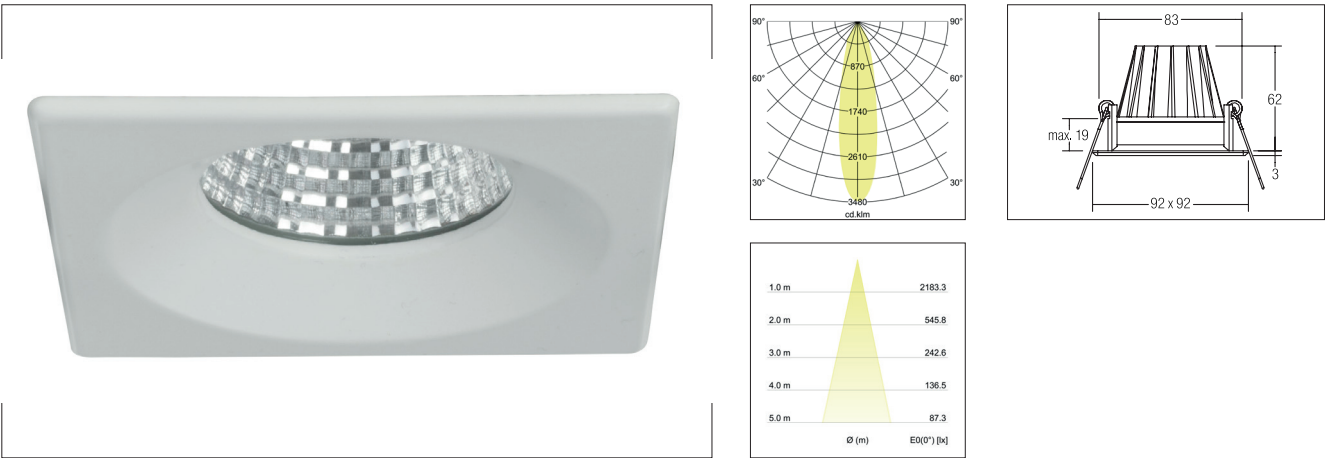

LED recessed downlight BOWL, white, square. In a compact design, for installation in tool-less rapid assembly systems Lamp holder: Plug&Play, Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Glass, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) III, Current: 700 mA, Power: 7W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 660lm, Colour temperature: 4.000 K, Beam angle: 30°, Adjustability: Not adjustable, With control gear: No, Control: Dimming depending on driver.

Artikel-Nr.	12530074
Stand:	25.10.2021 22:29

Colour temperature	4000 K
Colour	White
Length	92 mm
Beam angle	30 °
Amount of light sources / fittings	1 Qty
Material	Aluminium / Glass
Lamp holder	Plug&Play
Power	7 W
Lamp	LED
Colour rendering	CRI > 80

Control	Dimming depending on driver
Built-in diameter	83 mm
Installation depth	62 mm
Current	700 mA
Degree of protection	IP20
Protection class	III
Adjustability	Not adjustable
Length	92 mm
Width	92 mm
Circuit type	Series conduction