


LED recessed downlight, dim2warm
Artikel-Nr. 12116253

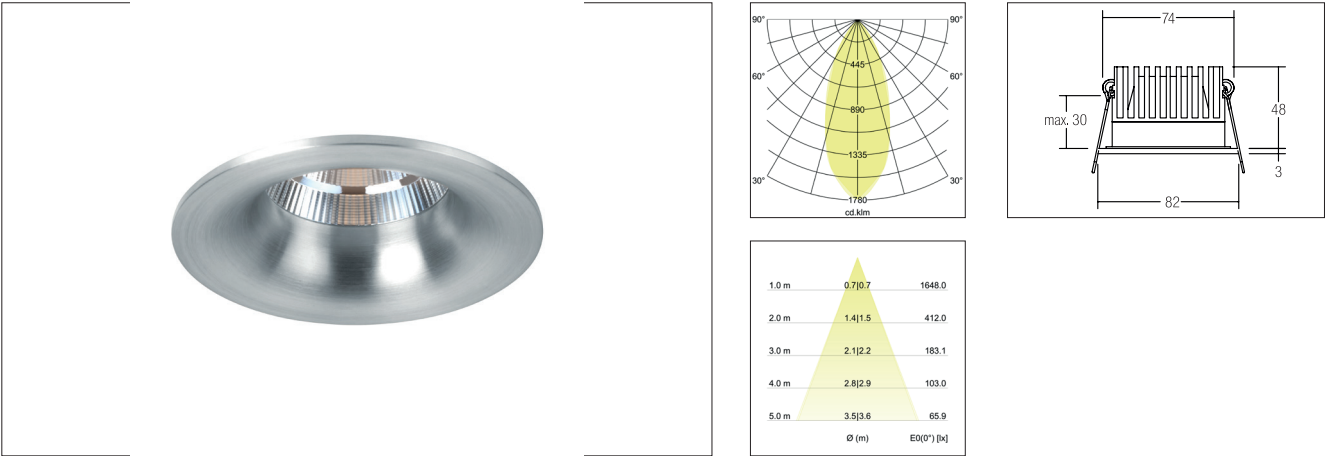

LED recessed downlight, dim2warm, alu, round. In a compact design, for installation in tool-less rapid assembly systems. If the lamp is dimmed, the color temperature is reduced. Lamp holder: Plug&Play, Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) III, Current: 350 mA, Power: 12W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 930lm, Colour temperature: from 3000 K to 1800 K, Beam angle: 24°, Adjustability: Not adjustable, With control gear: No, control: Dimming depending on driver. This luminaire contains incorporated and non-exchangeable LED light sources.

Artikel-Nr.	12116253
Stand:	19.07.2021 10:26

Colour of light	3000 - 1800 K
Colour	Alu
Beam angle	24 °
Amount of light sources / fittings	1 Qty
Material	Aluminium / Plastic
Lamp holder	Plug&Play
Power	12 W
Lamp	LED
Colour rendering	CRI > 90

control	Dimming depending on driver
Outer diameter	82 mm
Built-in diameter	74 mm
Installation depth	48 mm
Current	350 mA
Degree of protection	IP20
Protection class	III
Adjustability	Not adjustable
Circuit type	Series conduction