





LED recessed spot set, IP65, dimmable  
Artikel-Nr. 39355073

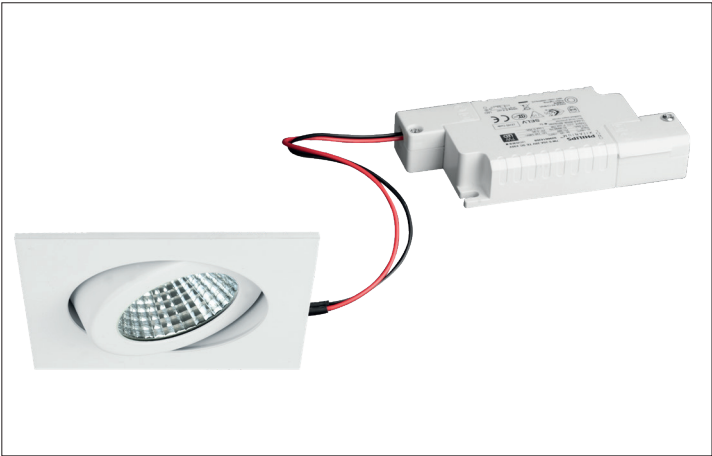

LED recessed spot set, IP65, dimmable, white, square. In a compact design, for installation in tool-less rapid assembly systems. Set including a converter for 230-V mains voltage, trailing-edge phase dimmable, dimensions of converter: L 110 x W 50 x H 19 mm . Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Steel / Silicone rubber / Plastic, Degree of protection: according to DIN EN 60529 IP65, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 6W, Luminous flux: 650lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 38°, Adjustability: Pivoted, With control gear: Yes, Control: Trailing-edge phase.

|                      |                                               |
|----------------------|-----------------------------------------------|
| Artikel-Nr.          | 39355073                                      |
| Stand:               | 26.10.2021 02:25                              |
| Colour temperature   | 3000 K                                        |
| Colour               | White                                         |
| Length               | 82 mm                                         |
| Beam angle           | 38 °                                          |
| Material             | Aluminium / Steel / Silicone rubber / Plastic |
| Power                | 6 W                                           |
| Lamp                 | LED                                           |
| Colour rendering     | CRI > 80                                      |
| Control              | Trailing-edge phase                           |
| Built-in diameter    | 68 mm                                         |
| Installation depth   | 50 mm                                         |
| Voltage              | 230V AC 50Hz                                  |
| Degree of protection | IP65                                          |
| Protection class     | II                                            |
| Adjustability        | Pivoted                                       |
| Length               | 82 mm                                         |
| Width                | 82 mm                                         |
| Swivel angle         | 30 °                                          |
| Circuit type         | Parallel conduction                           |