


LED recessed spot
Artikel-Nr. 12396083

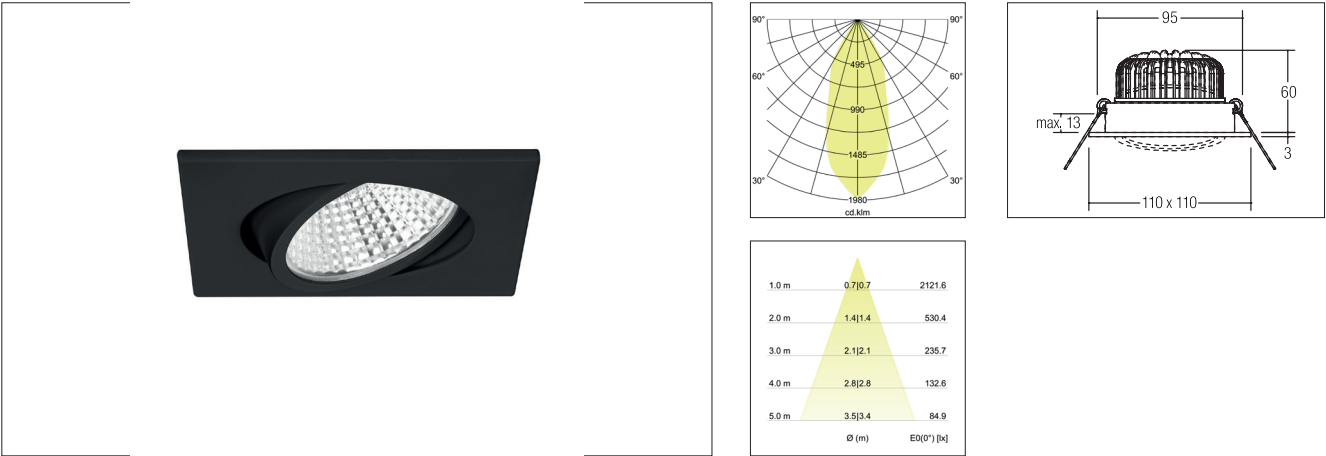

LED recessed spot, black, round. In a compact design, for installation in tool-less rapid assembly systemsLamp holder: Plug&Play, Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Glass, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) III, Current: 350 mA, Power: 12W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 1.230lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 38°, Adjustability: Pivoted, With control gear: No, Control: Dimming depending on driver.

Artikel-Nr.	12396083
Stand:	26.10.2021 05:34

Colour temperature	3000 K	Control	Dimming depending on driver
Colour	Black	Outer diameter	110 mm
Rated life time L80/B20 at 25 °C	50000 h	Built-in diameter	95 mm
Beam angle	38 °	Installation depth	60 mm
Amount of light sources / fittings	1 Qty	Current	350 mA
Material	Aluminium / Glass	Degree of protection	IP20
Lamp holder	Plug&Play	Protection class	III
Power	12 W	Adjustability	Pivoted
Lamp	LED	Swivel angle	15 °
Colour rendering	CRI > 80	Circuit type	Series conduction