





LED recessed spot INDIWO83, IP44, rotatable and pivoted
Artikel-Nr. 12287173

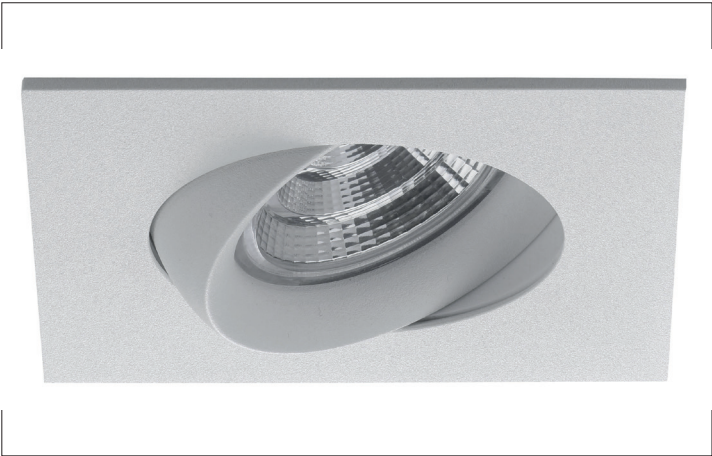

LED recessed spot INDIWO83, IP44, rotatable and pivoted, white, square. In a compact design, for installation in tool-less rapid assembly systems. Recessed spotlight suitable for direct mounting on normally flammable building materials. Thermal insulation allowed. Lamp holder: Plug&Play, Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Steel / Plastic, Degree of protection: according to DIN EN 60529 IP44*, Protection class: (EN 61140) III, Current: 350 mA, Power: 5.5W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 550lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 36°, Adjustability: Rotatable and pivoted, With control gear: No, Control: Dimming depending on driver.

Artikel-Nr.	12287173
Stand:	25.10.2021 21:01

Colour temperature	3000 K
Colour	White
Length	95 mm
Beam angle	36 °
Amount of light sources / fittings	1 Qty
Material	Aluminium / Steel / Plastic
Lamp holder	Plug&Play
Power	5,5 W
Lamp	LED
Colour rendering	CRI > 85
Control	Dimming depending on driver

Built-in diameter	83 mm
Installation depth	48 mm
Current	350 mA
Degree of protection	IP44 *
Protection class	III
Adjustability	Rotatable and pivoted
Length	95 mm
Width	95 mm
Rotation angle	30 °
Swivel angle	30 °
Circuit type	Series conduction