




LED recessed spot set, phase dimmable  
Artikel-Nr. 39144253

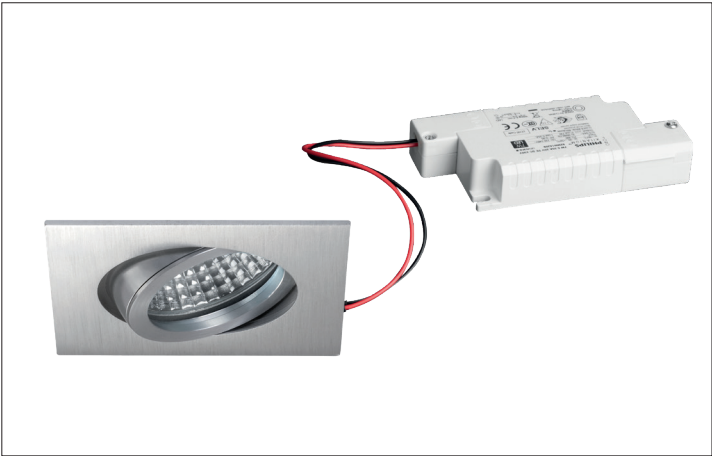

LED recessed spot set, phase dimmable, white, square. In a compact design, for installation in tool-less rapid assembly systems. Set including a converter for 230-V mains voltage, trailing-edge phase dimmable, dimensions of converter: L 110 x W 50 x H 19 mm. Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Glass / Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 6W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 680lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 38°, Adjustability: Pivoted, With control gear: Yes, Control: Trailing-edge phase.

|             |                  |
|-------------|------------------|
| Artikel-Nr. | 39144253         |
| Stand:      | 26.10.2021 04:06 |

|                                    |                             |                      |                     |
|------------------------------------|-----------------------------|----------------------|---------------------|
| Colour temperature                 | 3000 K                      | Voltage              | 230V AC 50Hz        |
| Colour                             | White                       | Degree of protection | IP20                |
| Beam angle                         | 38 °                        | Protection class     | II                  |
| Amount of light sources / fittings | 1 Qty                       | Circlip              | Without circlip     |
| Material                           | Aluminium / Glass / Plastic | Adjustability        | Pivoted             |
| Lamp                               | LED                         | Length               | 82 mm               |
| Colour rendering                   | CRI > 80                    | Width                | 82 mm               |
| Control                            | Trailing-edge phase         | Swivel angle         | 20 °                |
| Built-in diameter                  | 68 mm                       | Circuit type         | Parallel conduction |
| Installation depth                 | 50 mm                       |                      |                     |