





LED recessed spot set BB13, dim2warm, phase dimmable
Artikel-Nr. 39373153

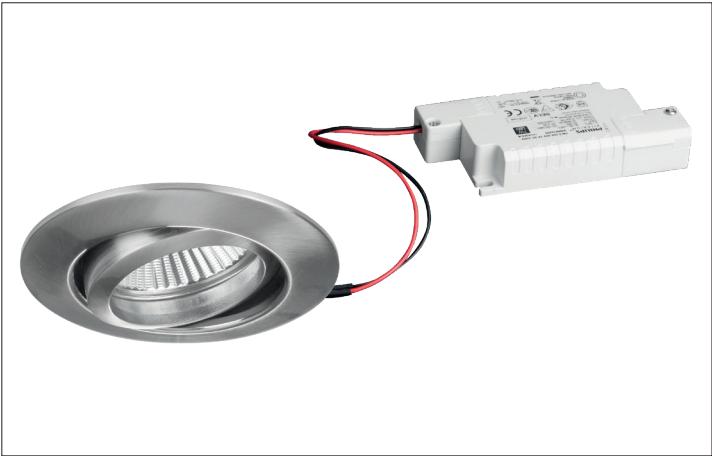

LED recessed spot set BB13, dim2warm, phase dimmable, nickel, round. In a compact design, for installation in tool-less rapid assembly systems. If the lamp is dimmed, the color temperature is reduced. Set including a converter for 230-V mains voltage, trailing-edge phase, Dimensions of converter: L 110 x W 50 x H 19 mm. Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Cast iron / Aluminium / Glass / Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 6W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 460lm, Colour temperature: from 1.800 K up to 3.000 K, Beam angle: 38°, Adjustability: Pivoted, With control gear: Yes, Control: Trailing-edge phase.

Artikel-Nr.	39373153
Stand:	25.10.2021 22:04

Colour temperature	3000 K - 1800 K
Colour	Nickel
Beam angle	38 °
Amount of light sources / fittings	1 Qty
Material	Cast iron / Aluminium / Glass / Plastic
Power	6 W
Lamp	LED
Colour rendering	CRI > 80
Control	Trailing-edge phase

Outer diameter	88 mm
Built-in diameter	68 mm
Installation depth	50 mm
Voltage	230V AC 50Hz
Degree of protection	IP20
Protection class	II
Adjustability	Pivoted
Swivel angle	25 °
Circuit type	Parallel conduction