


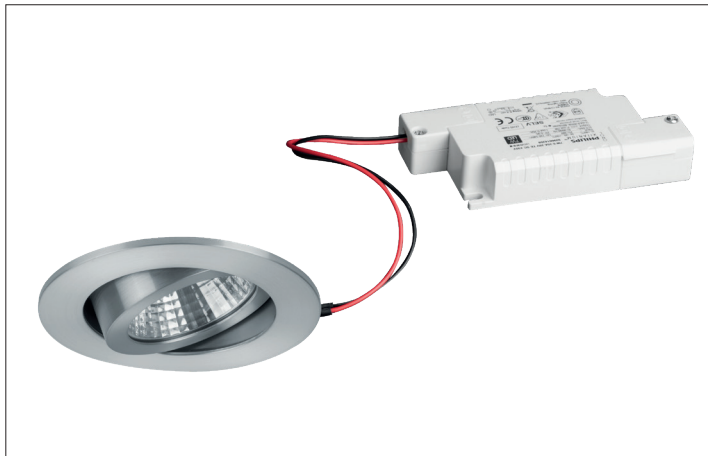


LED recessed spot set, IP65, dimmable

Artikel-Nr. 39353253

LED recessed spot set, IP65, dimmable, alu. round. In a compact design, for installation in tool-less rapid assembly systems. Set including a converter for 230-V mains voltage, trailing-edge phase dimmable, dimensions of converter: L 110 x W 50 x H 19 mm . Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Steel / Silicone rubber / Plastic, Degree of protection: according to DIN EN 60529 IP65, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 6W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 650lm, Colour temperature: 3000 K, Light colour : White, Beam angle: 38°, Adjustability: Pivoted, With control gear: Yes, control: Trailing-edge phase.

Artikel-Nr.		39353253	
Stand:		19.07.2021 18:06	
Colour of light	3000 K	Outer diameter	82 mm
Colour	Alu	Built-in diameter	68 mm
Beam angle	38 °	Installation depth	50 mm
Amount of light sources / fittings	1 Qty	Voltage	230V AC 50Hz
Material	Aluminium / Steel / Silicone rubber / Plastic	Degree of protection	IP65
Power	6 W	Protection class	II
Lamp	LED	Adjustability	Pivoted
Colour rendering	CRI > 80	Swivel angle	30 °
control	Trailing-edge phase	Circuit type	Parallel conduction