
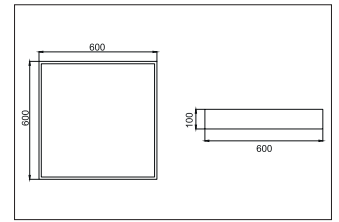



**BIRO Square surface mounted luminaire**  
**Artikel-Nr. 13710184**

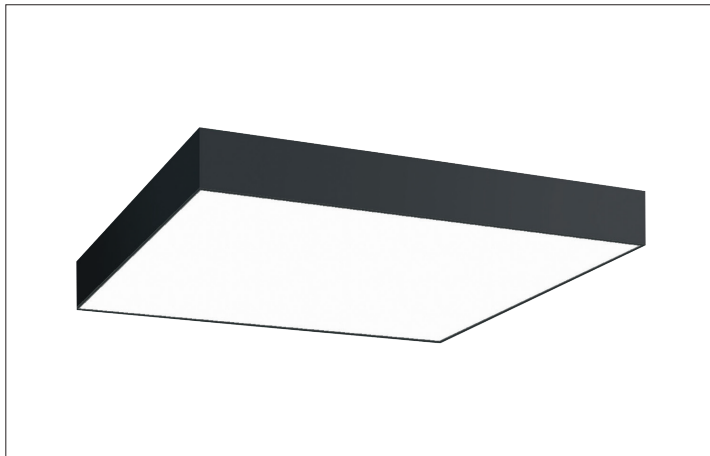

1.0 m	3.113.1	1781.3
2.0 m	6.216.2	445.3
3.0 m	9.319.3	197.9
4.0 m	12.412.3	111.3
5.0 m	15.515.4	71.3
Ø (m)		E0(0°) [lx]

BIRO Square surface mounted luminaire, black, square. Surface mounting, Ceiling-mounted Mounting method: Surface mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Steel / Plastic, Degree of protection: according to DIN EN 60529 IP40, Protection class: (EN 61140) I, Voltage: 230V AC 50Hz, Power: 44W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 5.456lm, Colour temperature: 4000 K, Light colour : White, Beam angle: 114°, With control gear: Yes. This luminaire contains incorporated and non-exchangeable LED light sources

<b>Artikel-Nr.</b>	<b>13710184</b>
<b>Stand:</b>	21.07.2021 19:52

control	DALI
Colour	Black
Colour of light	4000 K
System efficiency	124 lm/W
Luminous flux	5,456 lm
Material cover	Plastic, opal
System output	44 W
Colour rendering	CRI > 80
Beam angle	114 °
Amount of light sources / fittings	1 Qty
Width	600 mm

Height	100 mm
Colour rendering	CRI > 80
Material	Aluminium / Steel / Plastic
Voltage	230V AC 50Hz
Lamp	LED
Light output	Direct
Shipping	Incl. converter for connection to the 230-V mains voltage
Degree of protection	IP40
Protection class	I
Voltage type	AC