




LED recessed profile BIRO40
Artikel-Nr. 77033088

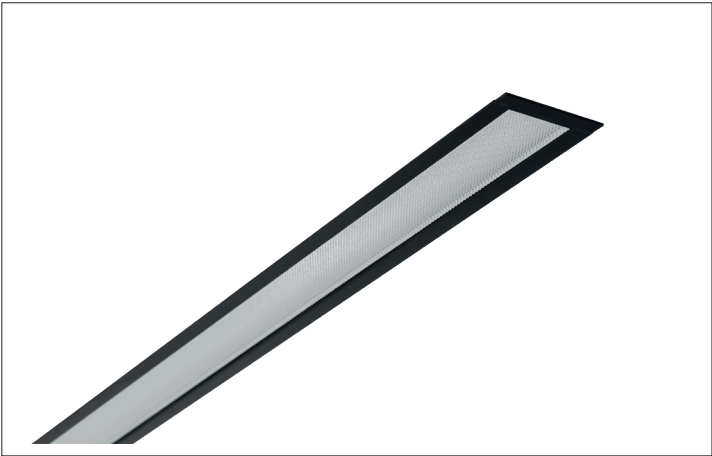

LED recessed profile BIRO40, black, rectangular. LED light channel with satin-finished cover. Lamp holder: LED, Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Acrylic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) I, Voltage: 230V AC 50Hz, Power: 31.4W, Luminous flux: 2.570lm, Colour temperature: from 2700 K up to 6500 K, Light colour : White, Beam angle: 80°, Adjustability: Not adjustable, With control gear: Yes.

Artikel-Nr.	77033088
Stand:	19.07.2021 11:40
control	DALI
Colour	Black
Colour of light	2700 K - 6500 K
Glare evaluation	UGR < 25
System efficiency	82 lm/W
Luminous flux	2,570 lm
Material cover	Satinised
Length	1158 mm
Colour rendering	CRI > 80
Beam angle	80 °
Width	59 mm
Built-in width	45 mm
Installation depth	110 mm
Material	Aluminium / Acrylic
Voltage	230V AC 50Hz
Lamp	LED
Light output	Direct
Degree of protection	IP20
Protection class	I
Voltage type	AC
Adjustability	Not adjustable