




LED recessed spot set, dimmable

**Artikel-Nr. 39364253**

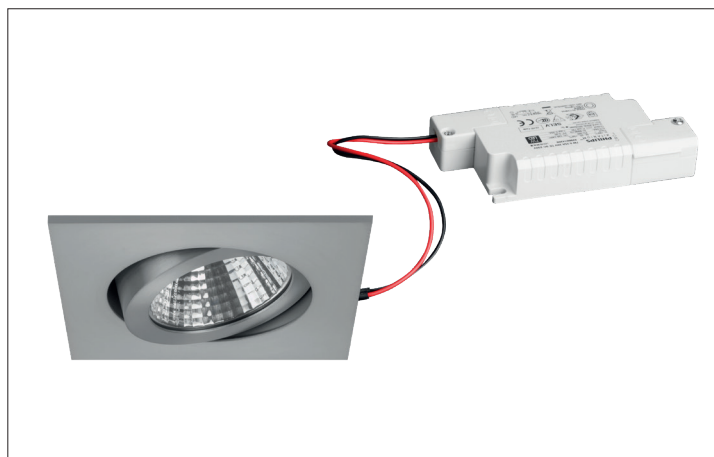

1.0 m	0.710.6	1369.2
2.0 m	1.411.3	342.3
3.0 m	2.111.9	152.1
4.0 m	2.812.5	85.6
5.0 m	3.513.1	54.8
Ø (m)	E0(0°) [lx]	

LED recessed spot set, dimmable, alu, square. In a compact design, for installation in tool-less rapid assembly systems. Set including a converter for 230-V mains voltage, trailing-edge phase dimmable, dimensions of converter: L 110 x W 50 x H 19 mm. Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 7W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 740lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 38°, Adjustability: Pivoted, With control gear: Yes, Control: Trailing-edge phase.

<b>Artikel-Nr.</b>	<b>39364253</b>
<b>Stand:</b>	25.10.2021 22:27

Colour temperature	3000 K
Colour	Alu
Length	0 mm
Beam angle	38 °
Amount of light sources / fittings	1 Qty
Material	Aluminium / Plastic
Power	7 W
Lamp	LED
Colour rendering	CRI > 80
Control	Trailing-edge phase

Built-in diameter	68 mm
Installation depth	38 mm
Voltage	230V AC 50Hz
Degree of protection	IP20
Protection class	II
Adjustability	Pivoted
Width	82 mm
Swivel angle	30 °
Circuit type	Parallel conduction