





LED recessed spot
Artikel-Nr. 12361633

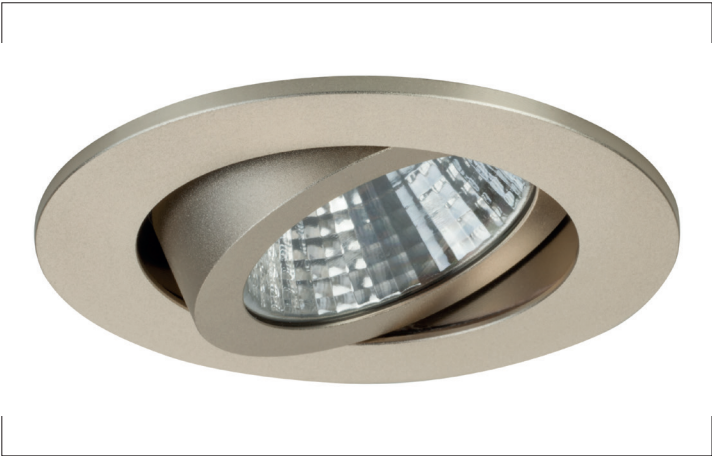

LED recessed spot, champagne, round. In a compact design, for installation in tool-less rapid assembly systemsLamp holder: Plug&Play, Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Polycarbonate, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) III, Current: 350 mA, Power: 7W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 740lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 38°, Adjustability: Pivoted, With control gear: No, Control: Dimming depending on driver.

Artikel-Nr.	12361633
Stand:	25.10.2021 22:30

Colour temperature	3000 K	Outer diameter	82 mm
Colour	Champagne	Built-in diameter	68 mm
Beam angle	38 °	Installation depth	38 mm
Amount of light sources / fittings	1 Qty	Current	350 mA
Material	Aluminium / Polycarbonate	Degree of protection	IP20
Lamp holder	Plug&Play	Protection class	III
Power	7 W	Adjustability	Pivoted
Lamp	LED	Swivel angle	30 °
Colour rendering	CRI > 80	Circuit type	Series conduction
Control	Dimming depending on driver		