





LED floor light BIRO60, with microprismatic cover and indirect light component

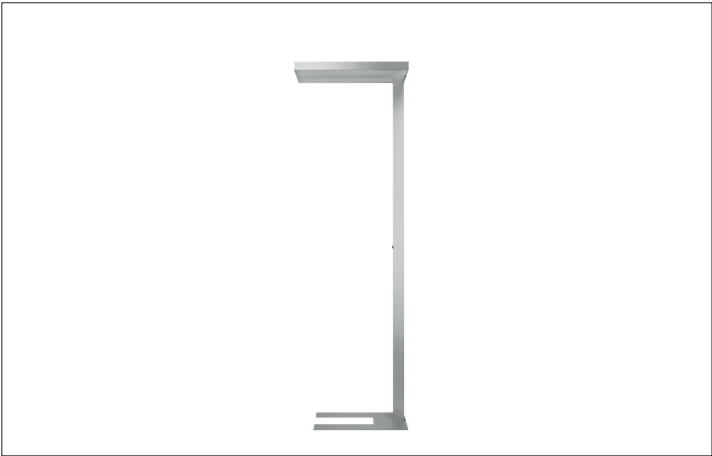

LED floor light BIRO60, with microprismatic cover and indirect light component, silver, square. Surface mounting, Floor-mounted. Delivery: including 3,000 mm supply line with Schuko angle plug. Direct + indirect light component. Direct component with cover PMMA, microprismatics. Indirect component with cover PMMA, transparent Mounting method: Surface mounting, Place of installation: Floor-mounted, Material: Aluminium / Steel / Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) I, Voltage: 230V AC 50Hz, Power: 82W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 9.100lm, Colour temperature: 4.000 K, Light colour : White, Beam angle: 105°, With control gear: Yes.

Artikel-Nr.	77402694
Stand:	07.12.2021 10:59

Description	Ansteuerung: schaltbar (nicht dimmbar)
Beam angle	105 °
Width	320 mm
Aufbauhöhe	1943 mm
Material cover	Plastic, opal
Material	Aluminium / Steel / Plastic
Beam angle	80 °
Material	Aluminium / Steel / Plastic
Colour rendering	CRI > 80
Colour temperature	4000 K
Colour	silber
Power	82 W

Lamp	LED
Luminous flux	9,100 lm
Optics	Mikroprismen (direkt) / Transparent (indirekt)
Voltage	230V AC 50Hz
Degree of protection	IP20
Protection class	I
Voltage type	AC
Length	600 mm
Width	320 mm
Aufbauhöhe	1943 mm
Dimensions	L x B x H: 600 x 320 x 1943 mm