





LED recessed profile BIRO40
Artikel-Nr. 77024073

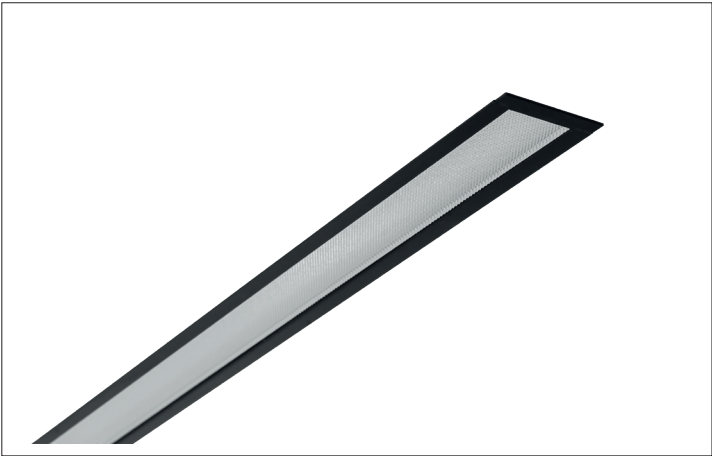

LED recessed profile BIRO40, white, rectangular. LED light channel with microprismatic cover. Lamp holder: LED, Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Acrylic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) I, Voltage: 230V AC 50Hz, Power: 35.8W, Luminous flux: 2.860lm, Colour temperature: 3000 K, Light colour : White, Beam angle: 80°, Adjustability: Not adjustable, With control gear: Yes.

Artikel-Nr.	77024073
Stand:	20.07.2021 18:09
control	DALI
Colour	White
Colour of light	3000 K
Glare evaluation	UGR < 19
System efficiency	80 lm/W
Luminous flux	2,860 lm
Material cover	Microprismatic
Length	2278 mm
Built-in length	2268 mm
Colour rendering	CRI > 90
Beam angle	80 °
Width	59 mm
Built-in width	45 mm
Installation depth	110 mm
Material	Aluminium / Acrylic
Voltage	230V AC 50Hz
Lamp	LED
Light output	Direct
Degree of protection	IP20
Protection class	I
Voltage type	AC
Adjustability	Not adjustable