


LED-Hallentiefstrahler SOL, DALI dimmbar
Artikel-Nr. 78310084

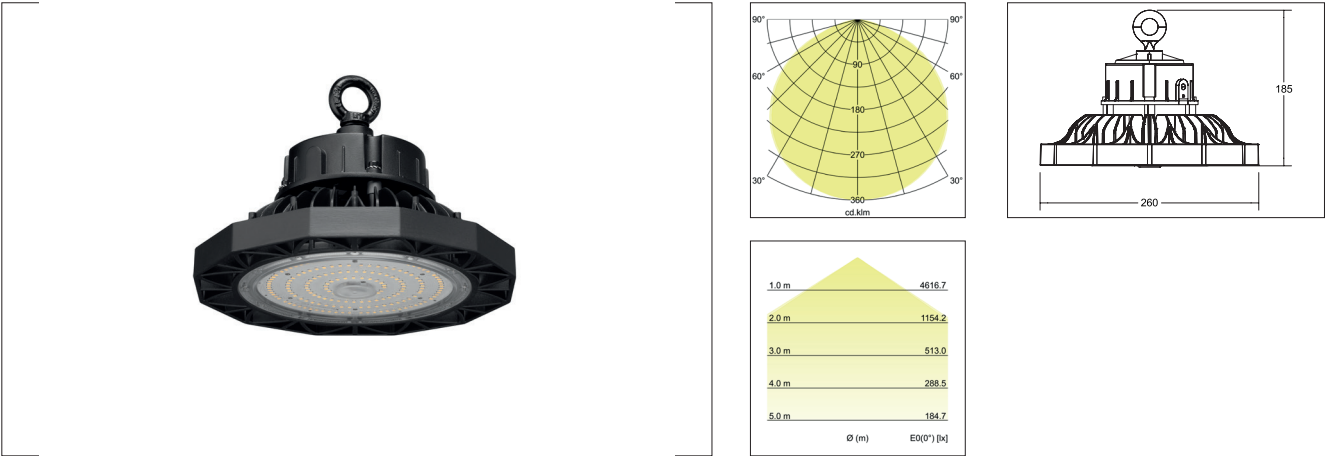

SOL Highbay 80, black, round. Suspended, Ceiling-mounted Mounting method: Suspended, Place of installation: Ceiling-mounted, Material: Aluminium / Polycarbonate, Degree of protection: according to DIN EN 60529 IP65, Protection class: (EN 61140) I, Voltage: 230V AC 50Hz, Power: 80W, Luminous flux: 12.800lm, Colour temperature: 4000 K, Beam angle: 120°, With control gear: Yes, dimmable: Yes, control: DALI-2 .

Artikel-Nr.	78310084
Stand:	22.07.2021 04:02

Colour	Black	Colour rendering	CRI > 80
Colour of light	4000 K	control	DALI-2
Luminous flux	12,800 lm	Voltage	230V AC 50Hz
weight	2.600 kg	Impact resistance	IK09
Beam angle	120 °	Degree of protection	IP65
Material	Aluminium / Polycarbonate	Protection class	I
Power	80 W	Height	195 mm
Lamp	LED	Circuit type	Parallel conduction
Shipping	inkl. schraubbarer Befestigungsöse und Anschlussleitung 250 mm		