


LED-Fluter MATRIX, IP66
Artikel-Nr. 60805644

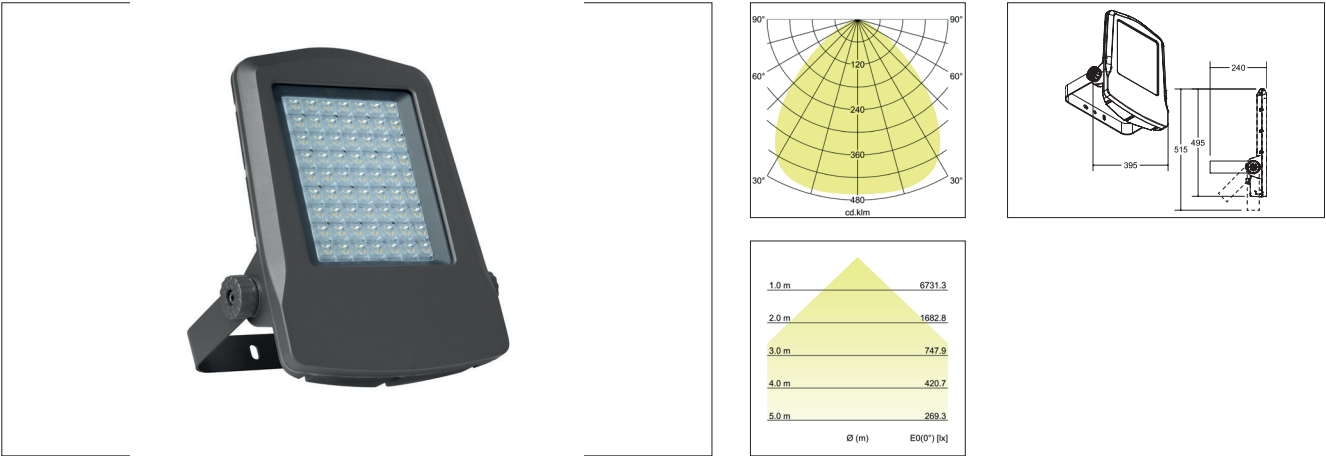

LED-Mastleuchte, titanium, square. Surface mounting, Wall-mounted Mounting method: Surface mounting, Place of installation: Wall-mounted, Material: Aluminium / Glass, Degree of protection: according to DIN EN 60529 IP66, Protection class: (EN 61140) I, Voltage: 230V AC 50Hz, Power: 100W, Luminous flux: 14.591lm, Colour temperature: 4000 K, Beam angle: 100°, Adjustability: Pivoted, With control gear: Yes, control: on/off.

Artikel-Nr.	60805644
Stand:	06.09.2021 13:32

Colour	Titanium
Colour temperature	4000 K
Luminous flux	14,480 lm
Impact resistance	IK08
weight	8.400 kg
Beam angle	100 °
Material	Aluminium / Glass
Lamp	LED
Shipping	inkl. Konverter zum Anschluss an 230 V-Netzspannung, schaltbar

Colour rendering	CRI > 80
Control	on/off
Voltage	230V AC 50Hz
Degree of protection	IP66
Protection class	I
Circuit type	Parallel conduction