


Kabelspezifikation / Cable specification

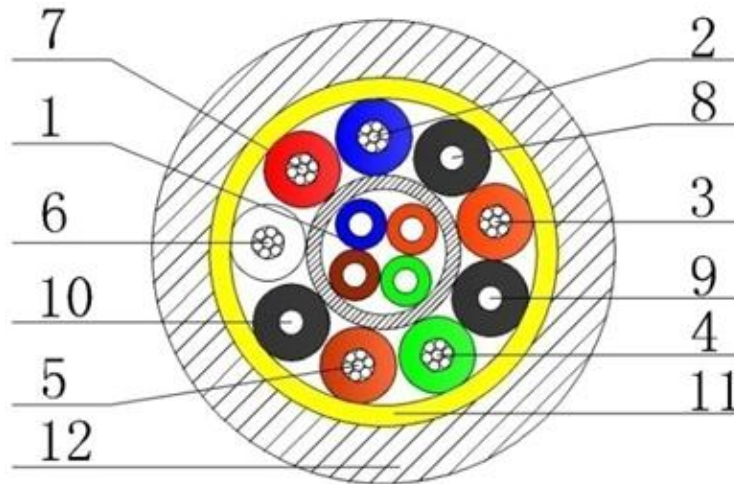

1. Innenkabel : 4 x Glasfaser (blau, orange, grün, braun AD= 1.3 -1.6mm)
Sub cable: 4 x fiber tight buffer (blue, orange, green, brown OD= 1.3 - 1.6mm)
- 2-7. Kabel: Verseiltes Kupfergeflecht 7*0.127 (AWG28),
AD= 0,6 - 0,75mm (blau, orange, grün, braun, weiß, rot)
Cable: stranded copper wire 7*0.127 (AWG28),
OD= 0,6 - 0,75mm (blue, orange, green, brown, white, red)
- 8-10. Füllmaterial : 3 x tubes, schwarz, AD= 0.68 - 0.75mm
Filler: 3 x tubes, black, OD= 0.68 - 0.75mm
11. Kevlar
12. Außenmantel: LSZH schwarz, AD= 4,8 +- 0.15mm
Outer jacket: LSZH black, OD= 4,8 +- 0.15mm