

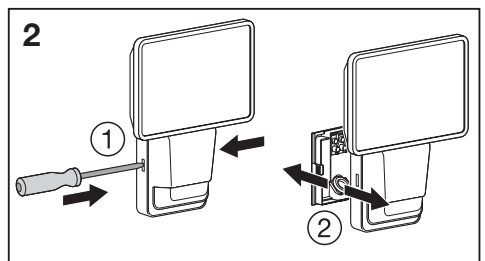
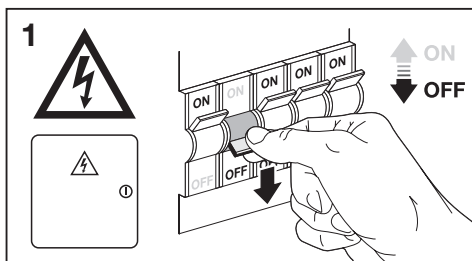
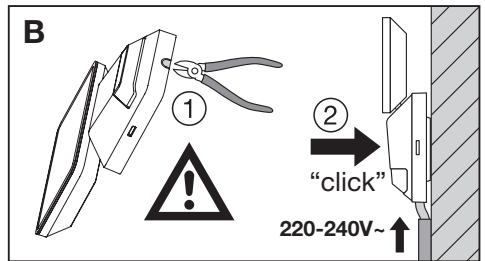
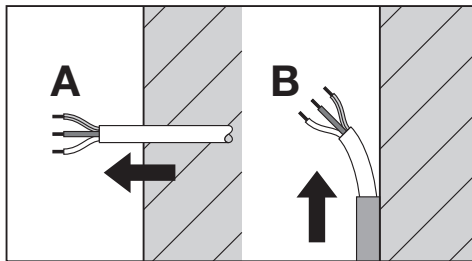
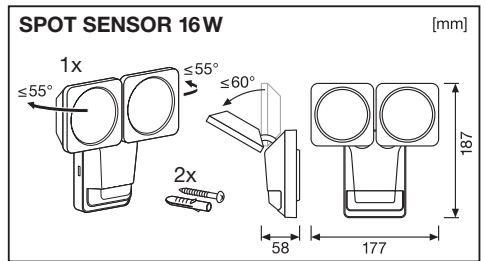
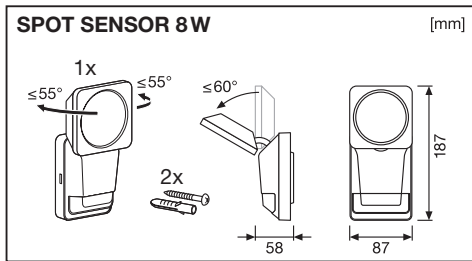
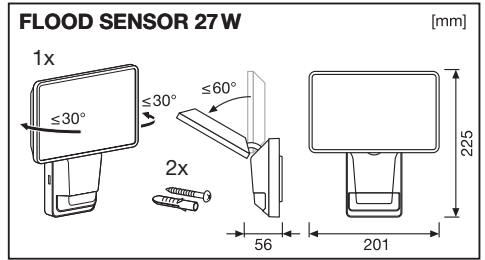
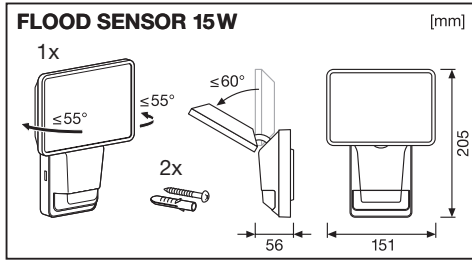
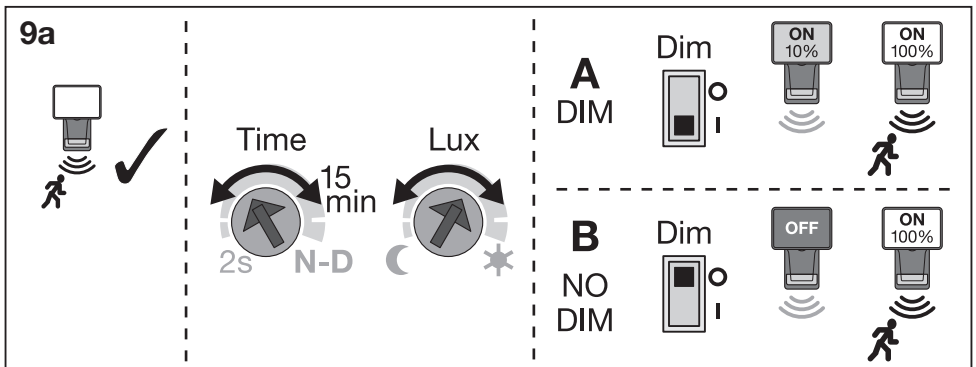
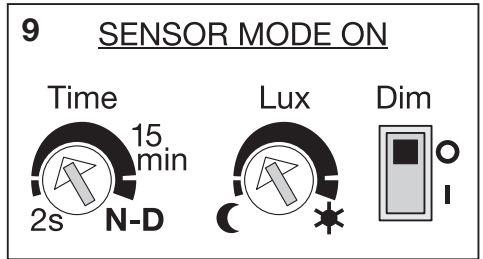
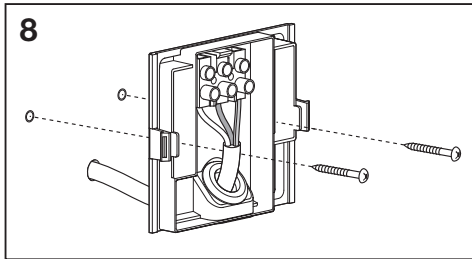
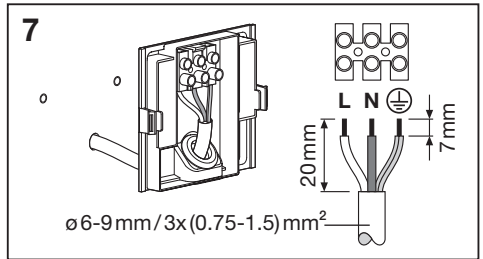
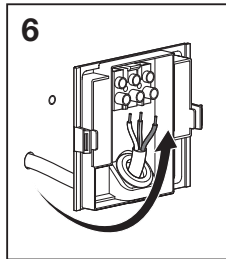

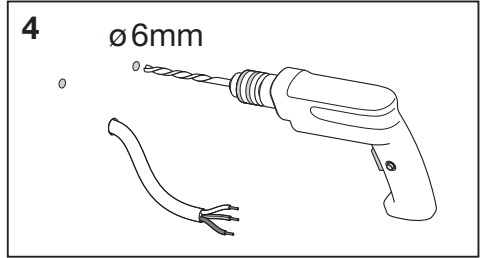
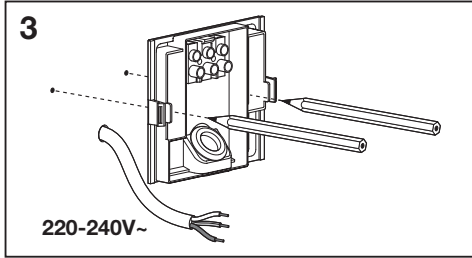

ENDURA® PRO LUMINAIRES




	EAN	W	lm Light Source	lm Output	K	IP	°C	V~	Hz	PF	R _a	∇ (°)	
E PRO FLOOD S 15W 840 IP55 WT	4058075228788	15	1980	1500	4000	55	-20...+40	220- 240	50/60	≥0.88	>80	100	100000
E PRO FLOOD S 15W 840 IP55 DG	4058075228801	15	1980	1500	4000	55	-20...+40	220- 240	50/60	≥0.88	>80	100	100000
E PRO FLOOD S 27W 840 IP55 WT	4058075228825	27	3800	3000	4000	55	-20...+40	220- 240	50/60	≥0.90	>80	100	100000
E PRO FLOOD S 27W 840 IP55 DG	4058075228849	27	3800	3000	4000	55	-20...+40	220- 240	50/60	≥0.90	>80	100	100000
E PRO SPOT S 8W 840 IP55 WT	4058075228863	8	1070	750	4000	55	-20...+40	220- 240	50/60	≥0.88	>80	50	100000
E PRO SPOT S 8W 840 IP55 DG	4058075228887	8	1070	750	4000	55	-20...+40	220- 240	50/60	≥0.88	>80	50	100000
E PRO SPOT S 16W 840 IP55 WT	4058075228900	16	2140	1500	4000	55	-20...+40	220- 240	50/60	≥0.88	>80	50	100000
E PRO SPOT S 16W 840 IP55 DG	4058075228924	16	2140	1500	4000	55	-20...+40	220- 240	50/60	≥0.88	>80	50	100000



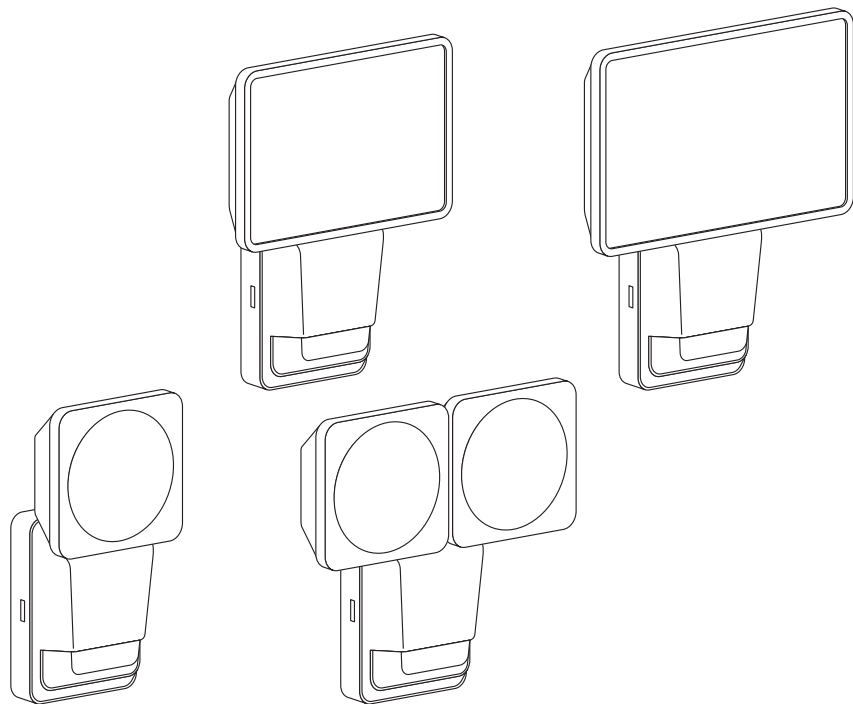

9b

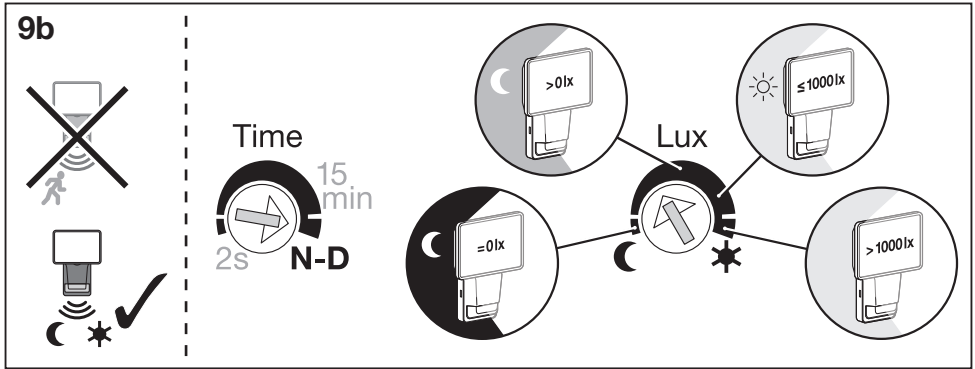

Time 15 min
2s N-D

Lux


$>0lx$

$\leq 1000lx$

$=0lx$

$>1000lx$


10

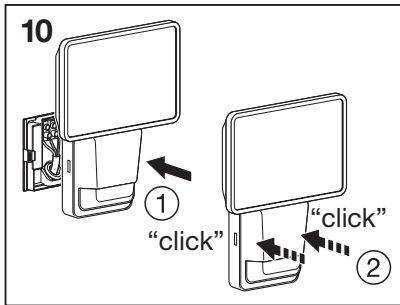

1 "click"


2 "click"

11

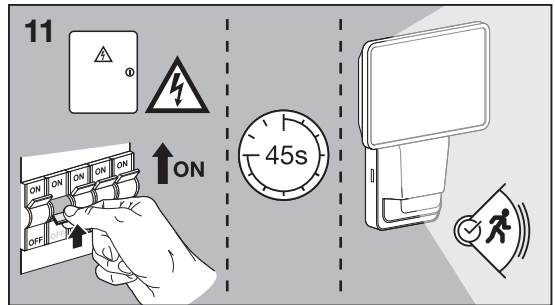


45s

ON

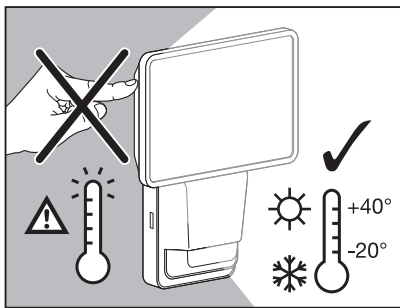

$+40^\circ$

-20°

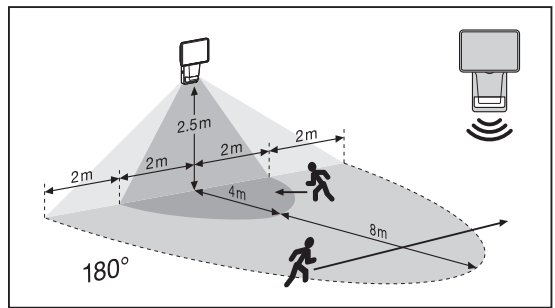

2.5m

2m

2m



2m





2m

4m

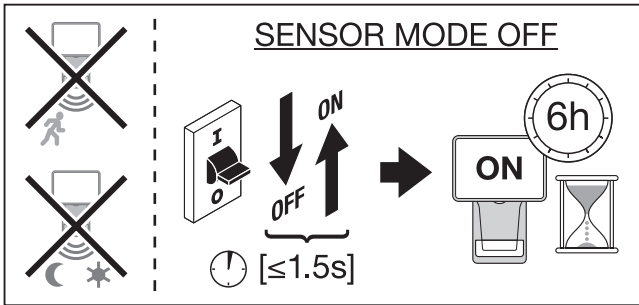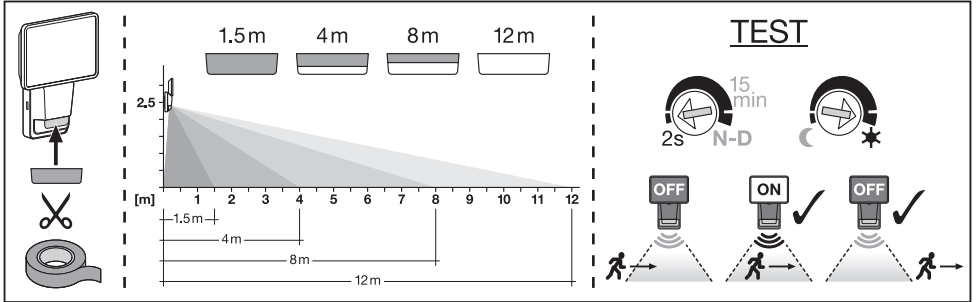8m

180°



	EAN	This product contains a light source of energy efficiency class	Contained Light Source
E PRO FLOOD S 15W 840 IP55 WT E PRO FLOOD S 15W 840 IP55 DG	4058075228788 4058075228801	D	
E PRO FLOOD S 27W 840 IP55 WT E PRO FLOOD S 27W 840 IP55 DG	4058075228825 4058075228849	D	
E PRO SPOT S 8W 840 IP55 WT E PRO SPOT S 8W 840 IP55 DG	4058075228863 4058075228887	D	
E PRO SPOT S 16W 840 IP55 WT E PRO SPOT S 16W 840 IP55 DG	4058075228900 4058075228924	D	Contains 2 light sources 



Points de collecte sur www.quefairedemesdechets.fr

C10449057
G11144761
15.07.2022



LEDVANCE GmbH
Steinerne Furt 62
86167 Augsburg, Germany
www.ledvance.com