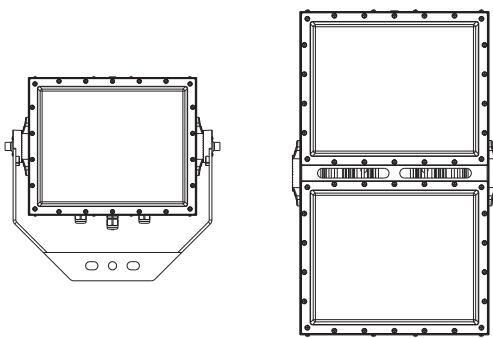
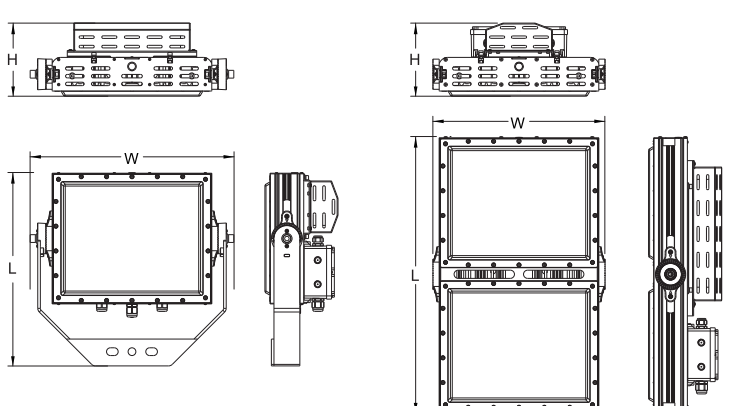


LED Flood HO

OPPLE



Version date 09-07-2020
www.opple.com

Model	CCT	kg
LED AFL-P 310W	3000K/4000K/5700K	13kg
LED AFL-P 620W	3000K/4000K/5700K	17kg

Model	L (mm)	W (mm)	H (mm)
LED AFL-P 310W	449	472	170
LED AFL-P 620W	639	399	170

310W



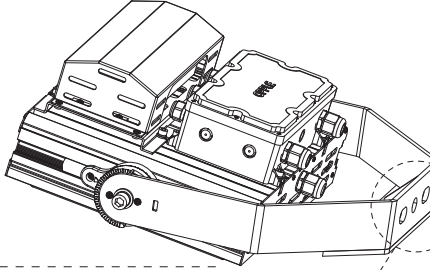



M16


2x 2x 2x 2x

*Mounting bolts not included



NOTE:
To ensure a safe installation the product must be secured using minimum 2 mounting bolts.

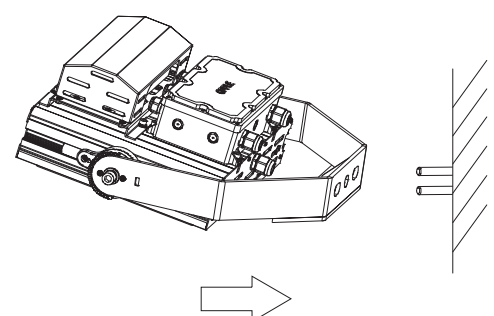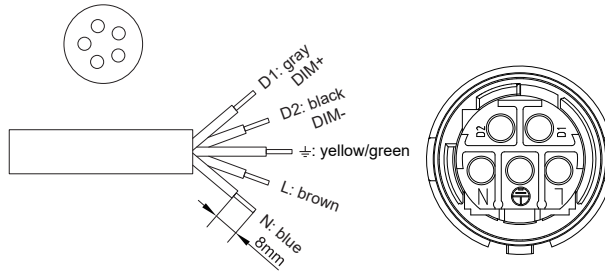D1: gray DIM+
 D2: black DIM-
 ±: yellow/green
 L: brown
 N: blue 8mm



Luminaire → ←
 220-240VAC
 min. Ø10mm
 max. Ø14mm
 Cable: 5×0.75~4mm²

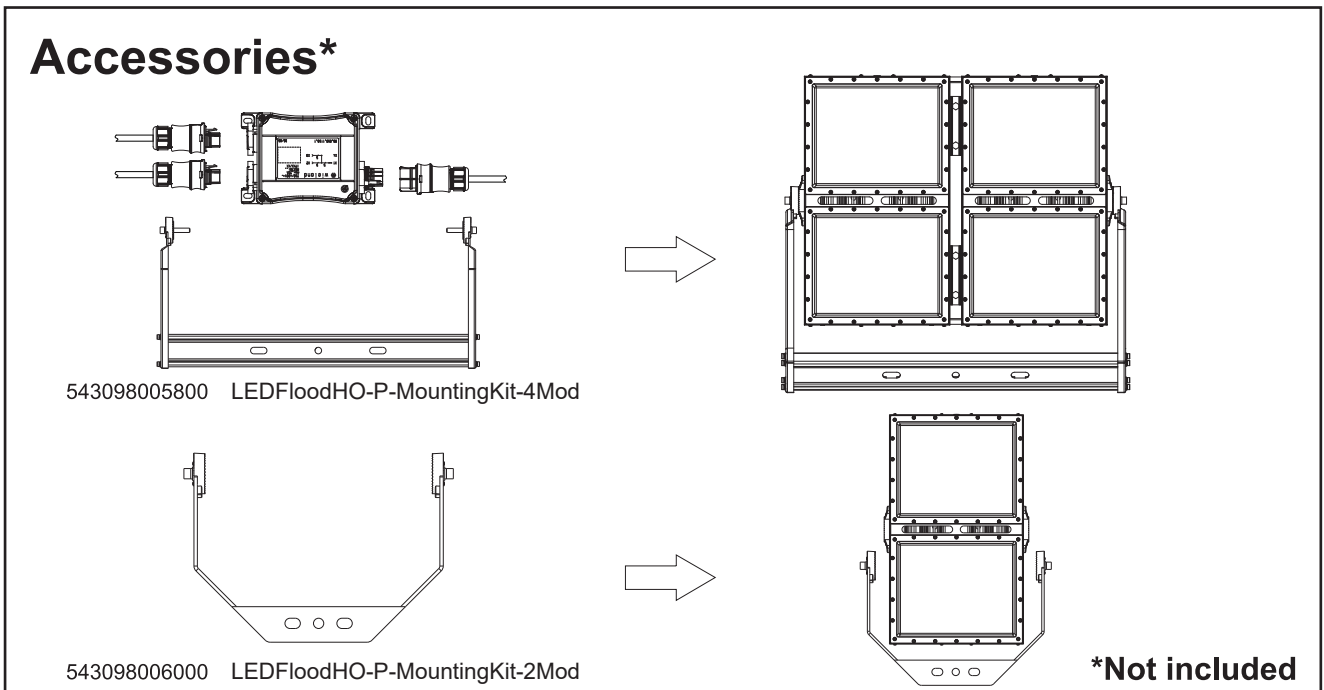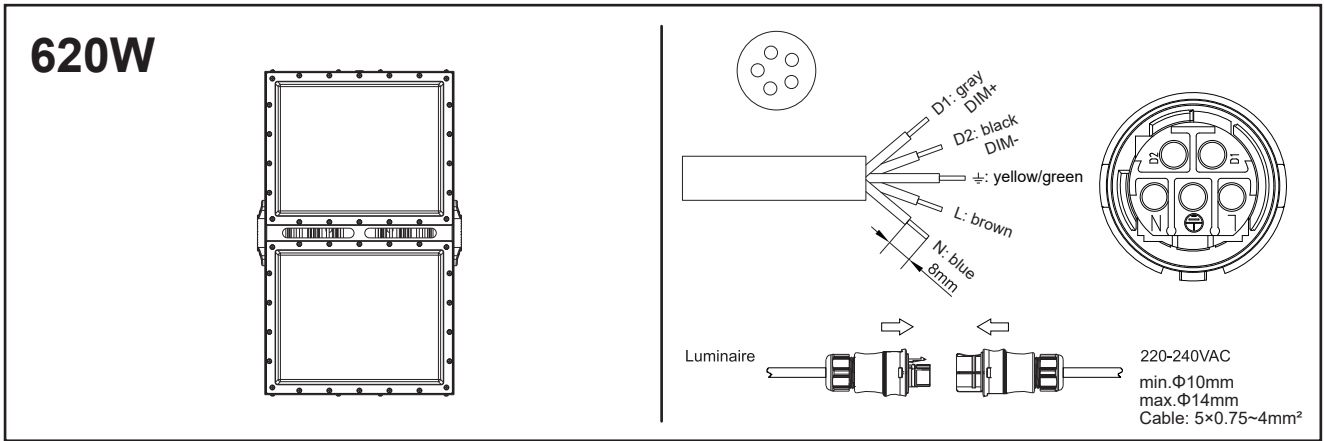

In case of damage to the wire, it has to be replaced only by the manufacturer, distributor or by an expert, to avoid risks.



Caution: Any operation on LED module is forbidden while power-on.

Zur Vermeidung von Risiken müssen defekte Leitungen ausschließlich vom Hersteller, Inverkehrbringer oder Fachmann ausgetauscht werden.

Achtung: In Betrieb ist keine Arbeit am LED-Modul erlaubt.


For non-user replaceable light sources.




The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



Do not stare directly at the light source.
The minimum safe viewing distance is 13m.



Minimum distance from illuminated object.



For use in environments where normal non-conductive/conductive dust accumulation may be expected, not for use in environments with expected high/unusual dust accumulation.

