




ORBIS ULTRA SLIM BACKLIGHT



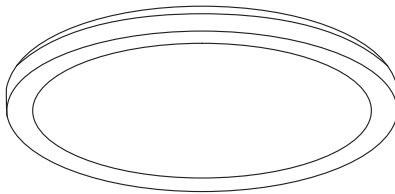

	EAN	W	Im Light source	Im Output	K	°(°C)	V~	mA	Hz	DF	
ORBIS ULTRA SLIM BL CLICKDIM 235 WT	4058075752825	15	1640	1100	3000	-20...+40	220-240	70	50/60	>0.9	25000
ORBIS ULTRA SLIM BL CLICKDIM 235 BK	4058075752863	15	1640	1020	3000	-20...+40	220-240	70	50/60	>0.9	25000
ORBIS ULTRA SLIM BL CLICKDIM 400 WT	4058075752849	22	2720	1850	3000	-20...+40	220-240	98	50/60	>0.9	25000
ORBIS ULTRA SLIM BL CLICKDIM 400 BK	4058075752887	22	2720	1740	3000	-20...+40	220-240	98	50/60	>0.9	25000


ORBIS ULTRA SLIM BACKLIGHT

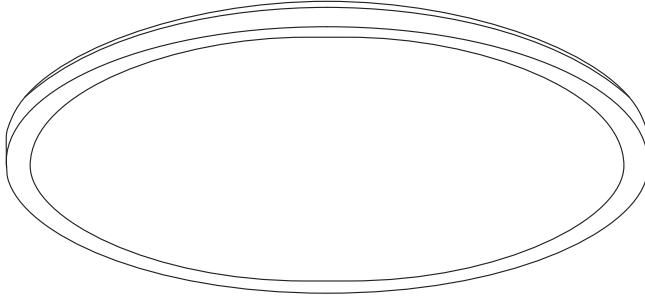



1x 


2x  2x 

4058075752849
4058075752887
1065g

1x 

2x  2x 



4058075752825
4058075752863
430g



mm

	H	ø
ORBIS ULTRA SLIM BL CLICKDIM 235 WT	27	235
ORBIS ULTRA SLIM BL CLICKDIM 235 BK	27	235
ORBIS ULTRA SLIM BL CLICKDIM 400 WT	27	400
ORBIS ULTRA SLIM BL CLICKDIM 400 BK	27	400


1


ON ON ON ON ON
OFF OFF OFF OFF OFF

↑ ON
↓ OFF


2









3

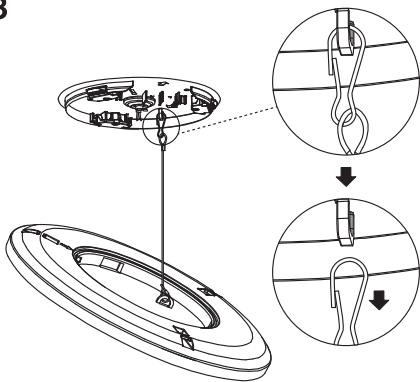


4

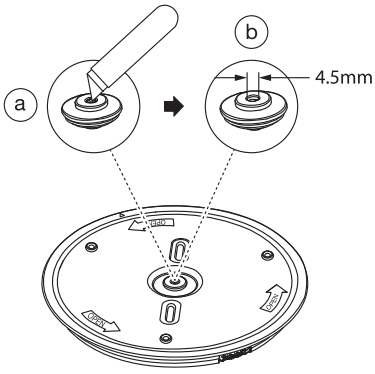


a b 4.5mm

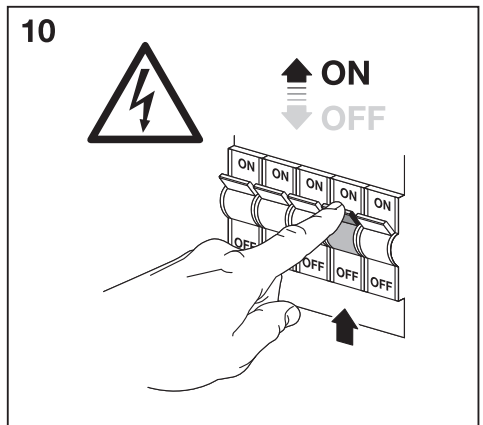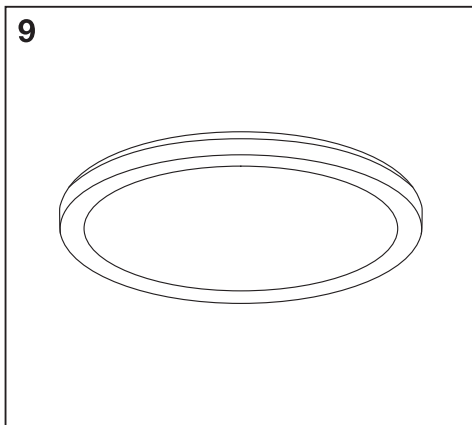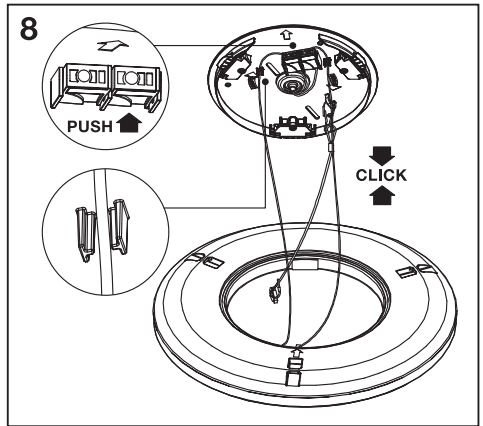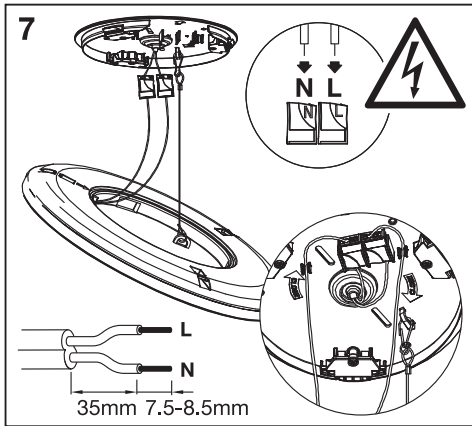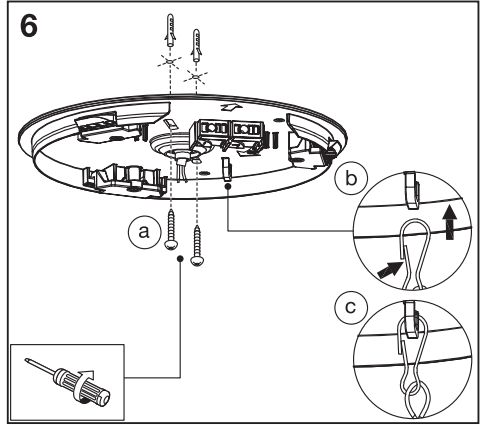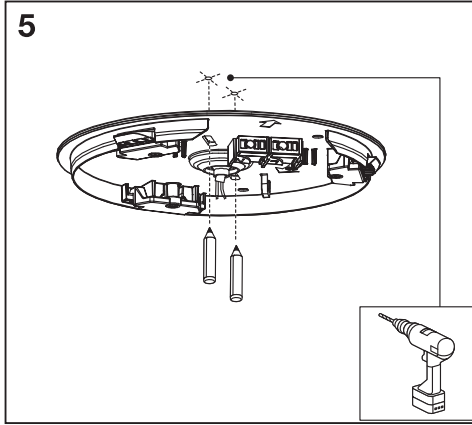

11

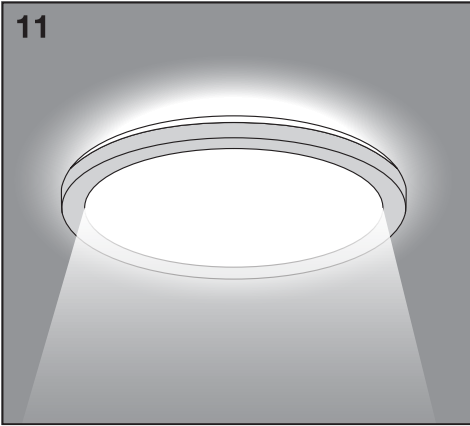

3 click dim setting memory

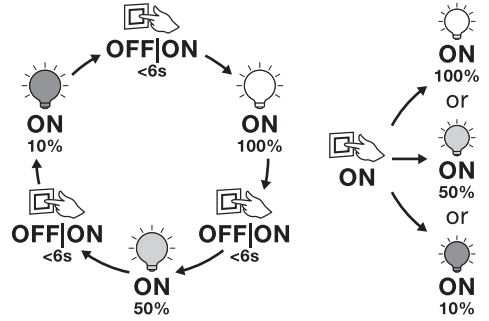

	EAN	This product contains a light source of energy efficiency class	Contained Light Source
ORBIS ULTRA SLIM BL CLICKDIM 235 WT	4058075752825	E	
ORBIS ULTRA SLIM BL CLICKDIM 235 BK	4058075752863	E	
ORBIS ULTRA SLIM BL CLICKDIM 400 WT	4058075752849	E	
ORBIS ULTRA SLIM BL CLICKDIM 400 BK	4058075752887	E	

FR
 Cet appareil se recycle

À DÉPOSER EN MAGASIN
 À DÉPOSER EN DÉCHÈTERIE

Points de collecte sur www.quefairedemesdechets.fr

C10449057
 G11136994
 12.04.2022



LEDVANCE GmbH
 Steinerne Furt 62
 86167 Augsburg, Germany
www.ledvance.com