


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	MAX BUNDLE DIAMETER	"L" LENGTH ±.3" [ 7 ]
MLTC2H-LP316	2" [ 51 ]	7.9" [ 201 ]
MLTC2.7H-LP316	2.7" [ 69 ]	10.15" [ 258 ]
MLTC4H-LP316	4" [ 102 ]	14.3" [ 362 ]
MLTC6H-LP316	6" [ 152 ]	20.5" [ 521 ]
MLTC8H-LP316	8" [ 203 ]	26.8" [ 679 ]
MLTC10H-LP316	10" [ 254 ]	33.0" [ 838 ]

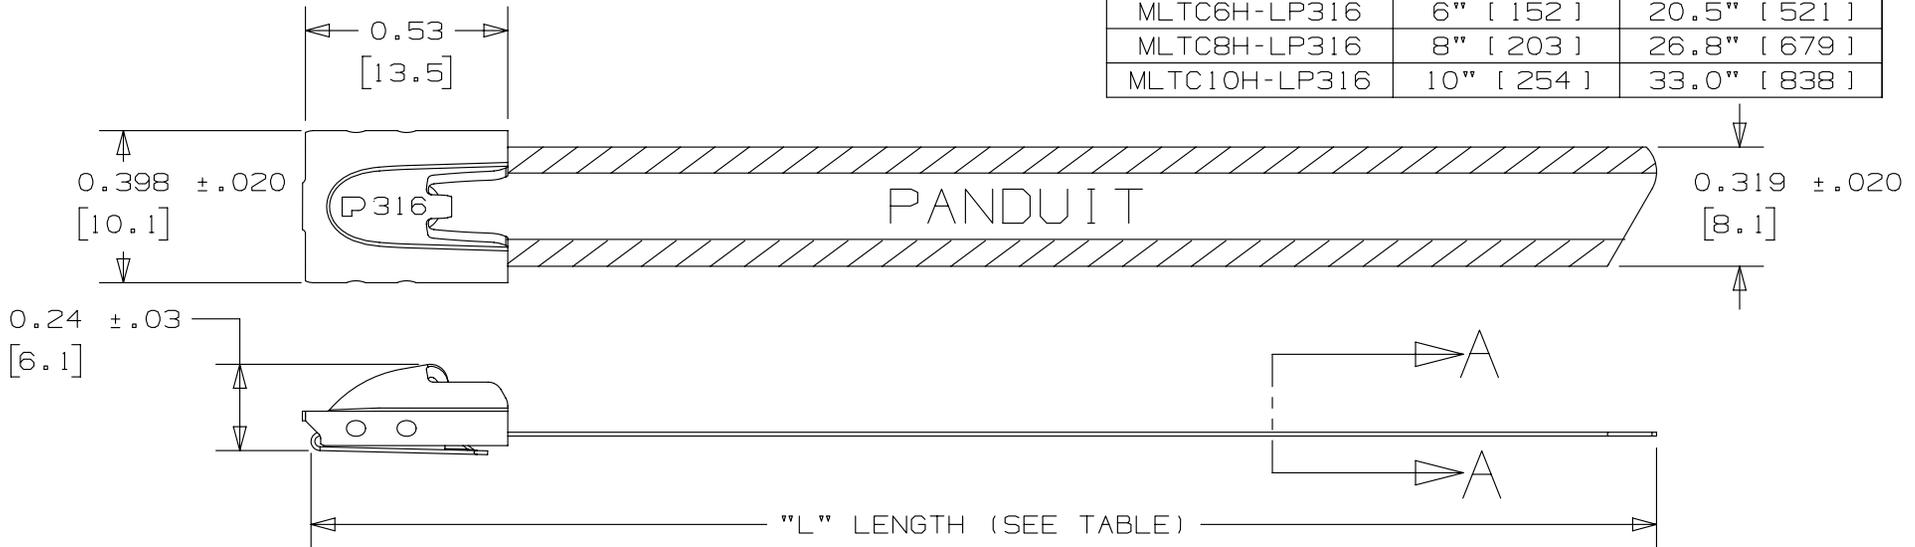

- NOTES:
- APPLICATION TOOLS - GS4MT, PPTMT, HTMT, & ST3MT
  - MINIMUM LOOP TENSILE STRENGTH - 250 lbs. [ 1112 NEWTONS ]
  - BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
  - TOLERANCES:  
 .X = ±.030 [ .8 ]    .XX = ±.020 [ .5 ]  
 .XXX = ±.010 [ .25 ]
  - MATERIAL: 316 STAINLESS STEEL
  - COATING: NYLON 11  
 COATING THICKNESS: .003"/.005" [ 0.08-0.13 ] PER SIDE

316 STAINLESS STEEL (.010 REF)  
 NYLON 11 COATING  
 0.018 ±0.002  
 [ 0.5 ±0.1 ]  
 SECTION A-A  
 SCALE 4:1

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	TITLE			MATERIAL:			
							SELECTIVELY COATED METAL LOCKING TIE HEAVY SERIES WITH NYLON 11 COATED BODY					SEE NOTES	
							CUSTOMER DRAWING					<b>PANDUIT</b>	
							ITEM REVISION NAME N41140BS/08			DRAWING NUMBER: N41140BS_DC			
							DATASET FILE NAME N41140BS_DC/08A			UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]		DRAWING NUMBER: N41140BS_DC	
08A	7/14	JHNU	SKB	RGB	ADDED .010 REF TO SECTION A-A ADDED THICKNESS DIMENSION TO SECTION A-A	SSECN01155	.x ± .1 [ 2.54 ]    .xxx ± .005 [ .127 ] .xx ± .01 [ .25 ]    ANGLES ± 5 °			THIRD ANGLE PROJECTION			
07A	3/13	JAMB	MIM	RGRO	UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01042				DRAWING NUMBER: N41140BS_DC			
06A	2/12	MIM	RGRO	---	NOTE #3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	-----	DRAWN BY/DATE JAMB 2/12			CHK/SCALE DPN 2:1			
							SHT 1 OF 1			SIZE A			