



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	MAX. BUNDLE DIAMETER	PACKAGE QUANTITY	LENGTH +/- .3" [7]
MLTFC2EH-LP316	2" [51]	50	11.8" [300]
MLTFC4EH-LP316	4" [102]	50	17.1" [434]
MLTFC6EH-LP316	6" [152]	50	23.4" [594]
MLTFC8EH-LP316	8" [203]	50	29.7" [754]

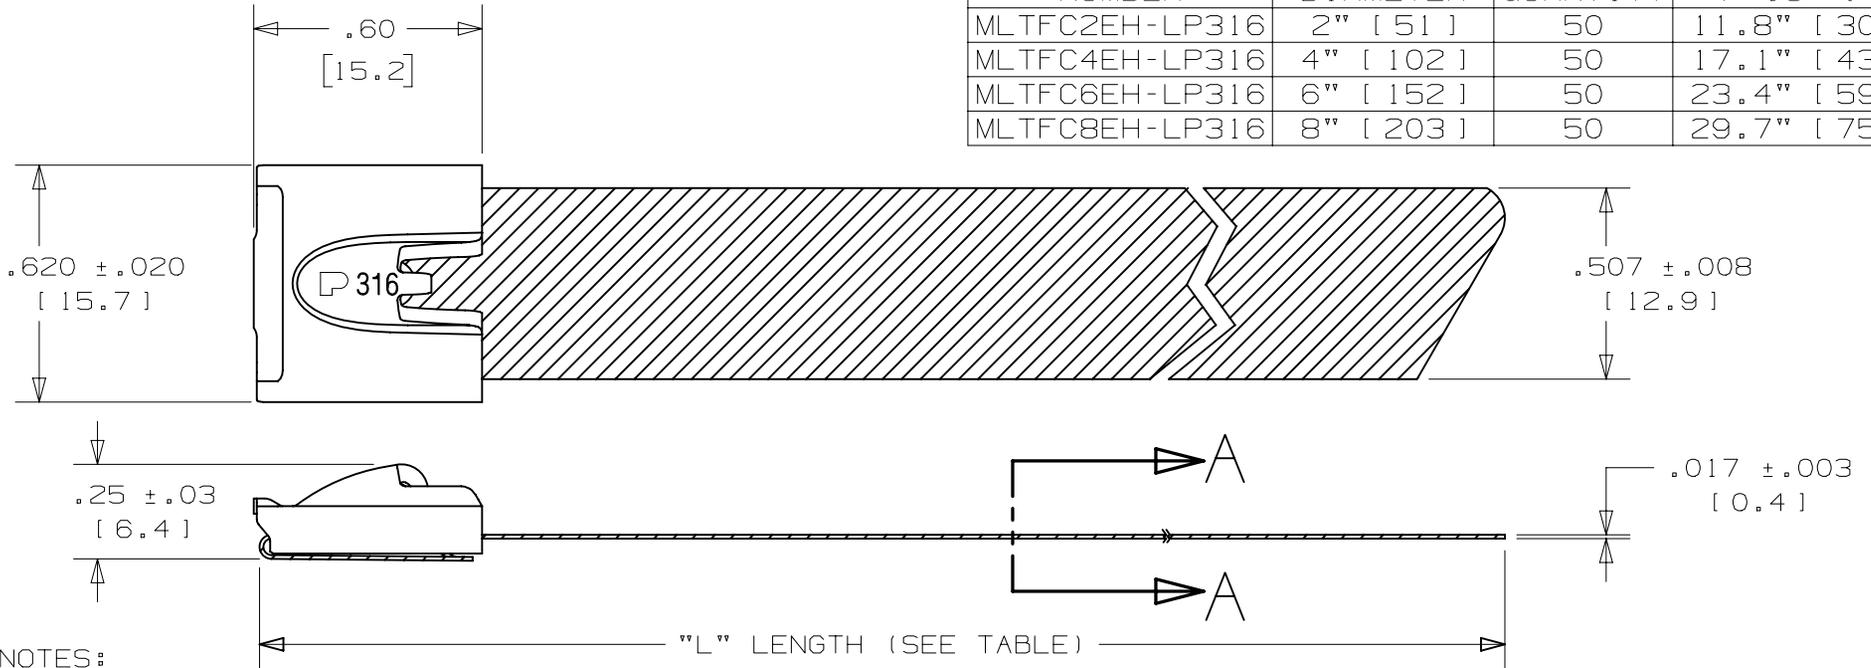

- NOTES:
1. APPLICATION TOOLS - PBTMT & RT2HT
 2. MINIMUM LOOP TENSILE STRENGTH - 300 LBS. (1335 NEWTONS) WHEN TESTED ON A 3" MANDREL
 3. BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
 4. TOLERANCES:
 .XXX = ±.010 [.25] .XX = ±.02 [.5]
 .X = ±.03 [.8] ANGLES = ±2°
 5. BASE MATERIAL: 316 STAINLESS STEEL
 6. COATING - POLYESTER
 COATING THICKNESS: .002 MIN./ .005 MAX. PER SIDE

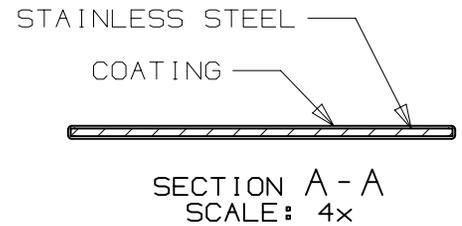

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
04A	11/14	JHNU	SKB	RGB	REMOVED ST3MT AND ADDED PBTMT APPLICATION TOOLS	SSECN01165
03A	4/13	JAMB	MIM	RGRO	UPDATED DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01051
02A	2/12	MIM	RGRO	---	NOTE #3: METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	-----
01A	10/08	JAMB	SKB	---	ORIG CAD FILE SPEC WAS S41216_01. NOTE #1: APPLICATION TOOL RT1HT REPLACED BY RT2HT	-----
01	4/07	JMMR	EJD	---	ADDED NOTE 6	SS00350
00	9/05	JAMB	EJD	---	DRAWING RELEASED	SS00052

TITLE						
METAL LOCKING TIE EXTRA HEAVY DUTY FULLY COATED						
CUSTOMER DRAWING						
ITEM REVISION NAME		N41216BS/04			PANDUIT	
DATASET FILE NAME		N41216BS_DC/04A				
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]						
.x ± .1 [2.54]		.xxx ± .005 [.127]			MATERIAL:	
.xx ± .01 [.25]		ANGLES ± 5 °			316 STAINLESS STEEL	
		THIRD ANGLE PROJECTION			DRAWING NUMBER:	
					N41216BS_DC	
DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1		SIZE
JAMB	9/05	EJD	2:1			A