



Montageanleitung

Ⓒ mounting instruction Ⓕ Notice de montage Ⓒ Instrukcja montażu
Ⓔ Instrucciones de montaje Ⓘ Istruzioni di montaggio


RES-FLEX-DS

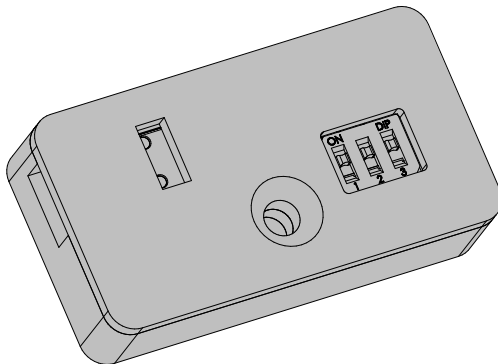


RIDI Leuchten GmbH
Hauptstrasse 31 - 33 · D-72417 Jungingen
Tel. 07477/872-0 · Fax 07477/872-48
kontakt@ridi.de · www.ridi.de

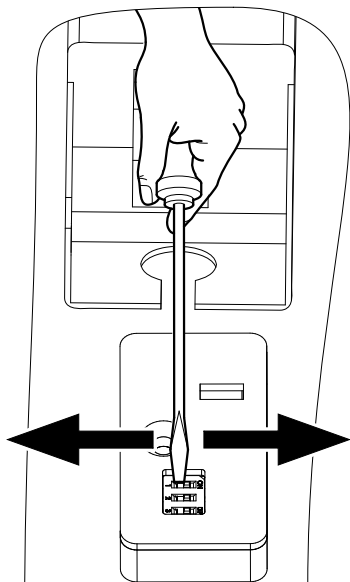

Flux max.

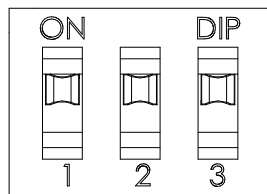

Flux min.

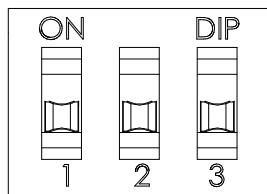

Pos	I (mA)	Flux (lm)	P (W)
	179	4900	33
	201	5500	37
	221	6000	40
	238	6400	43
	255	6900	46
	275	7400	50
	296	7900	53
	316	8400	57

ON
 1 2 3

1551103

- Ⓓ Werkseinstellung: Maximaler Lichtstrom
- ⒼⒷ Factory setting: maximum light distribution
- Ⓕ Réglage d'usine : flux lumineux maximal
- ⒼⓁ Ustawienie fabryczne: maksymalny strumień świetlny
- Ⓔ Ajuste de fábrica: flujo luminoso máximo
- Ⓘ Impostazione predefinita: flusso luminoso massimo



I (mA)
Flux (lm)
P (W)