

LED reflector insert MR16, 6 W, 350 mA

Article no. 12923603



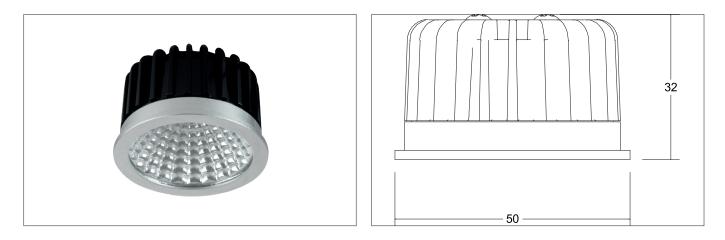



Tender

LED reflector insert MR16, 6 W, CRI>80, 350 mA, round. Version: Plug&Play, Material: Aluminum / glass, Protection rating on room side: to DIN EN 60529: IP20, Protection class: (EN 61140) III, Power: 6 W, Luminous flux: 720 lm, Colour temperature: 2,700 K, Beam angle: 60°, Without control gear, Type of dimming: Dependent on control gear.

Article data	
Article no.	12923603
GTIN	4251433936244
Short description	LED reflector insert MR16, 6 W, 350 mA
Material	Aluminium / Glass
Shape	Round
Outer diameter	50 mm
Hight	32 mm
Weight	0.056 kg
Conformance	CE, UKCA

Lighting technology	
Colour temperature	2.700 К
Light colour	White
Luminous flux	720 lm
Colour rendering	CRI > 80
Reflector	High-gloss
Beam angle	60°
Light sharing	Symmetric

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 24.04.2025 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

LED reflector insert MR16, 6 W, 350 mA

Article no. 12923603

Operating technology of the luminaire	
Voltage type	DC
Current	350 mA
Lamp	LED
Lamp holder	Plug&Play
Protection class	
Degree of protection	IP20
Control	Depending on driver
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service
	technician commissioned by him or a similarly qualified person.
Rated life time L80/B20 at 25 °C	50.000 h
Energy efficiency class	E
Packing data	

Packing data	
Gross weight	0.069 kg
Length of packaging	55 mm
Packaging width	55 mm
Packaging hight	65 mm
	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.
Disposal at end of life	By disposing of electrical waste and other old or defective electronics separately, you
	support recycling or other forms of re-use. In that way you help to take care and to avoid that
	harmful substances get into the environment.

LED reflector insert MR16, 6 W, 350 mA Article no. 12923603

Dequired according
Required accessories
Article no.: 17662000
LED converter 350 mA, on/off switchable
Power: 1 - 7,2 W, Plug&Play
Dimensions: 68 mm x 35 mm x 21 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17662000_2021_DE.pdf
Article no.: 17662020
LED converter 350 mA, on/off switchable
Power: 1 - 7,2 W, Plug&Play + Anschlussbox
Dimensions: 68 mm x 35 mm x 21 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf
Article no.: 17613000
LED converter 350 mA, on/off switchable
Power: 1 - 15 W, Plug&Play
Dimensions: 115 mm x 34 mm x 19 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf
Article no.: 17613020
LED converter 350 mA, on/off switchable
Power: 1 - 15 W, Plug&Play + Anschlussbox
Dimensions: 115 mm x 34 mm x 19 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf
Article no.: 17621000
LED converter 350 mA, on/off switchable
Power: 1 - 21 W, Plug&Play
Dimensions: 128 mm x 50 mm x 13 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf
Article no.: 17621020
LED converter 350 mA, on/off switchable
Power: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf
Article no.: 17663000
LED converter 350 mA, trailing-edge phase dimmable
Power: 2,8 - 7 W, Plug&Play
Dimensions: 110 mm x 50 mm x 19 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf
Article no.: 17663020
LED converter 350 mA, trailing-edge phase dimmable
Power: 2,8 - 7 W, Plug&Play + Anschlussbox
Dimensions: 110 mm x 50 mm x 19 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf
Article no.: 17652000
LED-round converter 350 mA, trailing-edge phase dimmer
Power: 4,9 - 7 W, Plug&Play
Dimensions: 51 mm x 24 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf
Article no.: 17652020
LED-round converter 350 mA, trailing-edge phase dimmer
Power: 4,9 - 7 W, Plug&Play + Anschlussbox
Dimensions: 51 mm x 24 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17652020_2021_DE.pdf

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 24.04.2025 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

LED reflector insert MR16, 6 W, 350 mA Article no. 12923603

Required accessories
Article no.: 17640000
LED converter 350 mA, trailing-edge phase dimmable
Power: 4,2 - 10 W, Plug&Play
Dimensions: 102 mm x 38 mm x 21 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17640000_2021_DE.pdf
Article no.: 17640020
LED converter 350 mA, trailing-edge phase dimmable
Power: 4,2 - 10 W, Plug&Play + Anschlussbox
Dimensions: 102 mm x 38 mm x 21 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17640020_2021_DE.pdf
Article no.: 17648000
LED converter 350 mA, trailing-edge phase dimmable
Power: 0,7 - 17 W, Plug&Play
Dimensions: 166 mm x 46 mm x 34 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17648000_2021_DE.pdf
Article no.: 17648020
LED converter 350 mA, trailing-edge phase dimmable
Power: 0,7 - 17 W, Plug&Play + Anschlussbox
Dimensions: 166 mm x 46 mm x 34 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17648020_2021_DE.pdf
Article no.: 17657000
LED converter 350 mA, 1-10 V dimmable (analog)
Power: 5,2 - 18 W, Plug&Play
Dimensions: 110 mm x 52 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17657000_2021_DE.pdf
Article no.: 17684000
LED converter 350 mA, DALI dimmable (digital)
Power: 2,8 - 7 W, Plug&Play
Dimensions: 130 mm x 42 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17684000_2021_DE.pdf
Article no.: 17684020
LED converter 350 mA, DALI dimmable (digital)
Power: 2,8 - 7 W, Plug&Play + Anschlussbox
Dimensions: 130 mm x 42 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17684020_2021_DE.pdf
Article no.: 17658000
LED round converter 350 mA, DALI dimmable (digital)
Power: 2,1 - 9 W, Plug&Play
Dimensions: 56 mm x 25 mm
https://www.brumberg.com/fileadmin/products/Datenblatt 17658000 2021_DE.pdf
Article no.: 17658020
LED round converter 350 mA, DALI dimmable (digital)
Power: 2,1 - 9 W, Plug&Play + Anschlussbox
Dimensions: 56 mm x 25 mm
https://www.brumberg.com/fileadmin/products/Datenblatt 17658020 2021_DE.pdf
Article no.: 17683000
LED converter 350 mA, DALI dimmable (digital)
Power: 3,5 - 17 W, Plug&Play
Dimensions: 110.5 mm x 52 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17683000_2021_DE.pdf
mager / www.stamberg.com/medulini/products/batenblatt_1/000000_2021_bt.pdf

LED reflector insert MR16, 6 W, 350 mA Article no. 12923603

Required accessories
Article no.: 17683020
LED converter 350 mA, DALI dimmable (digital)
Power: 3,5 - 17 W, Plug&Play + Anschlussbox
Dimensions: 110.5 mm x 52 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17683020_2021_DE.pdf
Article no.: 17682000
LED converter 350 mA, DALI dimmable (digital)
Power: 1,8 - 18,5 W, Plug&Play
Dimensions: 146.5 mm x 43.5 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17682000_2021_DE.pdf
Article no.: 17682020
LED converter 350 mA, DALI dimmable (digital)
Power: 1,8 - 18,5 W, Plug&Play + Anschlussbox
Dimensions: 146.5 mm x 43.5 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17682020_2021_DE.pdf
Article no.: 17671000
LED converter 350mA, ZigBee dimmable
Power: 3,5 - 18,5 W, Plug&Play
Dimensions: 146.5 mm x 44 mm x 30 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf
Article no.: 17671020
LED converter 350mA, ZigBee dimmable
Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox
Dimensions: 146.5 mm x 44 mm x 30 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf
Article no.: 17672000
LED converter 350mA, Casambi dimmable
Power: 3,5 - 18,5 W, Plug&Play
Dimensions: 146.5 mm x 44 mm x 30 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf
Article no.: 17672020
LED converter 350mA, Casambi dimmable
Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox
Dimensions: 146.5 mm x 44 mm x 30 mm
https://www.brumberg.com/fileadmin/products/Datenblatt 17672020 2021 DE.pdf

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 24.04.2025 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/