BRUMBERG
Light. Since 1873.

# P74-14 Wall surface-mounted profile

Article no. 53751070

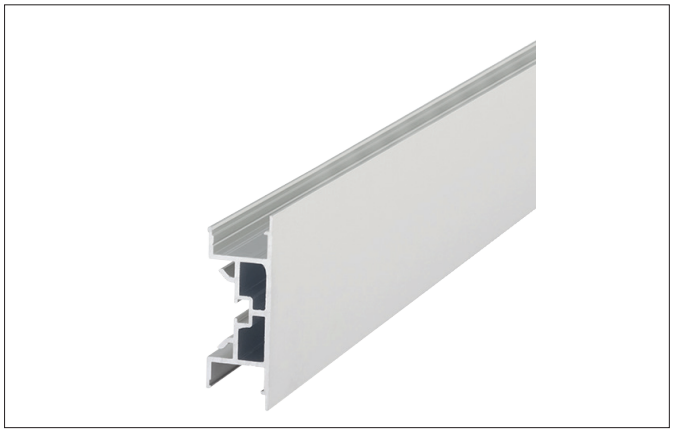

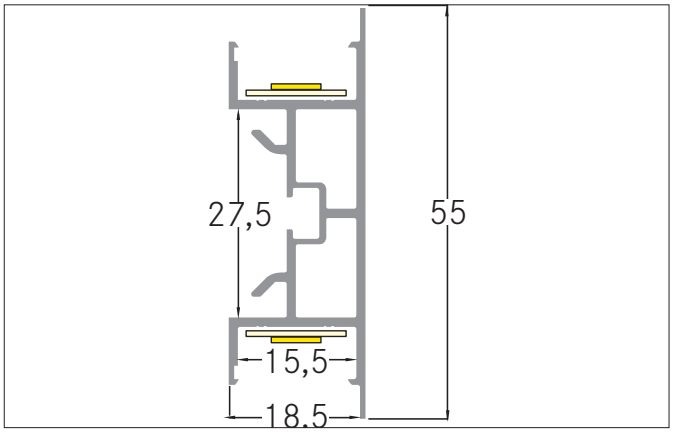


| Tender |
|---|
| Wall surface-mounted profile,. For optimal attachment of the profile this holders are suitable 53031000. For connecting of two profiles is the connector 53030000 optimal suited. With the use of profile covers 53440000 53440070 53440080 the additional mechanical protection and optimal light distribution can be achieved. The associated end cap set is under 53075070 available. Mounting method: Mounting profile. Material: Aluminium, dimensions profile: length: 2.000 mm x width: 18,5 mm x height: 55 mm |

**Product Benefits**

- Uncomplicated implementation of wall-mounted solutions for indirect lighting.
- Double staging of the illumination, upwards and downwards, normal white light lighting and or RGB or TunableWhite lighting.
- Up to 6 meters in length in one piece. (For deliveries beyond 2000mm: please ask for delivery cost separately).
- High quality accessories.

| Article data | |
|---|---|
| Article no. | 53751070 |
| GTIN | 4255752515531 |
| Series name | P74-14 |
| Short description | Wall surface-mounted profile |
| Material | Aluminium |
| Colour | White |
| Length | 2,000 mm |
| Width | 18.5 mm |
| Hight | 55 mm |
| Weight | 1.200 kg |
| Conformance | CE, UKCA |

BRUMBERG
Light. Since 1873.

## P74-14 Wall surface-mounted profile

Article no. 53751070

| Packing data | |
|---|---|
| Gross weight | 1.61 kg |
| Length of packaging | 2,020 mm |
| Packaging width | 80 mm |
| Packaging hight | 40 mm |
| Note | Please note that the materials aluminium and PMMA or PC can expand differently with changes in temperature! At a temperature change of 10ºC, the coefficient of expansion is approx. aluminium is approx. 0.7mm per metre, for plastic approx. 1.5mm per metre. This is not a defect in the product, this is a normal physical process. physical process. |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |