



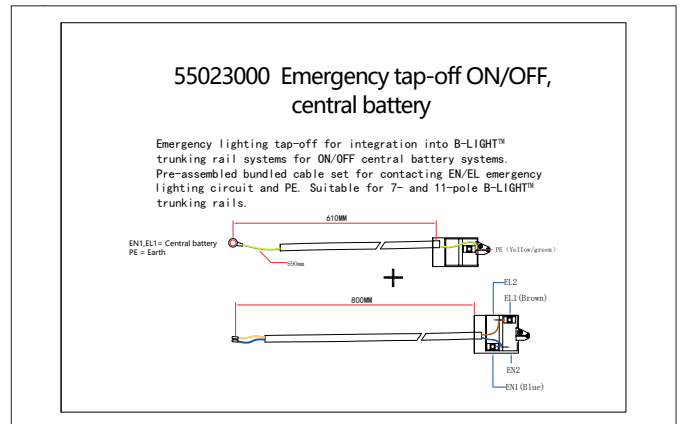

B-LIGHT® Emergency lighting tap ON/OFF (ZB)

Article no. 55023000

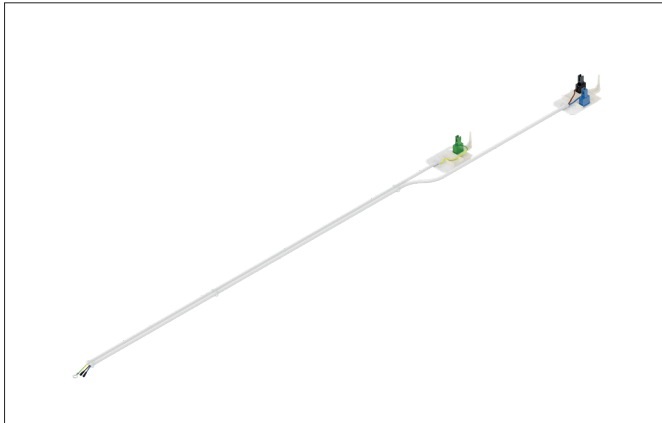

Tender

Emergency lighting tap ON/OFF (ZB), white matt. Emergency lighting tap for integration into B-LIGHT® mounting rail systems for ON/OFF central battery systems. Designed as a pre-assembled, bundled wire harness for connecting the EN/EL emergency lighting circuit and PE. Suitable for 7- and 11-pin B-LIGHT® mounting rails., Material: Plastic, Degree of protection: (DIN EN 60529) IP20, Protection class: (DIN EN 61140) I, .

Product Benefits

- Integration of ON/OFF emergency lighting components for central battery systems
- Direct connection to the EN/EL emergency lighting circuit
- Protective conductor connection via PE
- Pre-assembled, bundled wire harness
- Suitable for 7- and 11-pin B-LIGHT® mounting rails
- System-compatible integration of centrally powered emergency lighting components


B-LIGHT® Emergency lighting tap ON/OFF (ZB)

Article no. 55023000

Article data	
Article no.	55023000
GTIN	4255752530428
Series name	B-LIGHT®
Short description	Emergency lighting tap ON/OFF (ZB)
Material	Plastic
Colour	white matt
Length	845 mm
Width	37 mm
Hight	30 mm
Weight	0.05 kg
Conformance	CE

Packing data	
Gross weight	0.05 kg
Length of packaging	250 mm
Packaging width	180 mm
Packaging hight	20 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.

Optional accessories	
Article no.: 55170070 Blind cover 1.438 mm	
Dimensions: 1,438 mm x 64.7 mm x 45.5 mm https://www.brumberg.com/fileadmin/products/Datenblatt_55170070_2021_DE.pdf	
Article no.: 55170080 Blind cover 1.438 mm	
Dimensions: 1,438 mm x 64.7 mm x 45.5 mm https://www.brumberg.com/fileadmin/products/Datenblatt_55170080_2021_DE.pdf	