


FLOODLIGHT COMPACT GEN 2



LEDVANCE

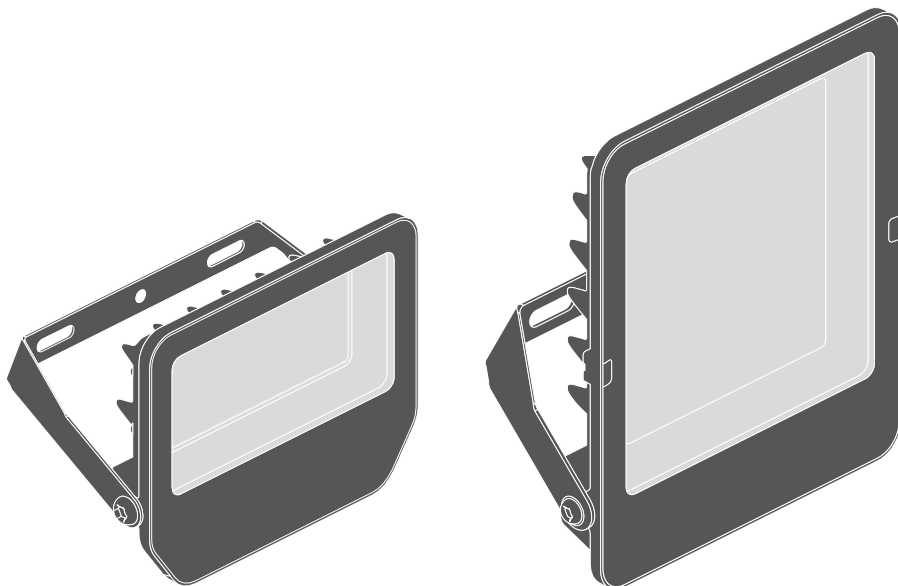

	EAN	l x w x h [mm]	f [Hz]	U [V]	* P [W]	** Ph _{L,V} [lm]	*** Eff. [lm/W]	CCT [K]
FL COMP 10/20 V 18W ML8304065 BK	4099854832147	126 x 124 x 32	50/60	220-240	18	2400	135	3000/4000/6500
FL COMP 10/20 V 18W ML8304065 WT	4099854832161	126 x 124 x 32	50/60	220-240	18	2400	135	3000/4000/6500
FL COMP 30/50 V 42W ML8304065 BK	4099854832185	163 x 164 x 32	50/60	220-240	42	6100	145	3000/4000/6500
FL COMP 30/50 V 42W ML8304065 WT	4099854832208	163 x 164 x 32	50/60	220-240	42	6100	145	3000/4000/6500
FL COMP 60/80 V 70W ML8304065 BK	4099854832222	184 x 250 x 35	50/60	220-240	70	10500	150	3000/4000/6500
FL COMP 125/150 V 105W ML8304065 BK	4099854832246	215 x 280 x 40	50/60	220-240	105	15700	150	3000/4000/6500
FL COMP 165/200 V 135W ML8304065 BK	4099854832260	245 x 320 x 40	50/60	220-240	135	20250	150	3000/4000/6500
FL COMP 200/250 V 178W ML8304065 BK	4099854832284	272 x 352 x 43	50/60	220-240	178	25800	145	3000/4000/6500

	EAN	IP	IK	∠ [°]	R _a	°C [°C]	PF	⚖ [kg]
FL COMP 10/20 V 18W ML8304065 BK	4099854832147	65	06	100	> 80	-30...+45	> 0.9	0.3
FL COMP 10/20 V 18W ML8304065 WT	4099854832161	65	06	100	> 80	-30...+45	> 0.9	0.3
FL COMP 30/50 V 42W ML8304065 BK	4099854832185	65	06	100	> 80	-30...+45	> 0.9	0.5
FL COMP 30/50 V 42W ML8304065 WT	4099854832208	65	06	100	> 80	-30...+45	> 0.9	0.5
FL COMP 60/80 V 70W ML8304065 BK	4099854832222	65	06	100	> 80	-30...+45	> 0.9	0.9
FL COMP 125/150 V 105W ML8304065 BK	4099854832246	65	06	100	> 80	-30...+45	> 0.9	1.2
FL COMP 165/200 V 135W ML8304065 BK	4099854832260	65	06	100	> 80	-30...+45	> 0.9	1.8
FL COMP 200/250 V 178W ML8304065 BK	4099854832284	65	06	100	> 80	-30...+45	> 0.9	2.3

FLOODLIGHT COMPACT GEN 2



FL COMP 10/20 V 18W						
* P [W]	18			9		
CCT [K]	3000	4000	6500	3000	4000	6500
** Ph_L_v [lm]	2160	2400	2250	1200	1350	1300
*** Eff. [lm/W]	120	135	125	135	150	145


FL COMP 30/50 V 42W						
* P [W]	42			24		
CCT [K]	3000	4000	6500	3000	4000	6500
** Ph_L_v [lm]	5600	6100	5800	3300	3600	3400
*** Eff. [lm/W]	135	145	140	140	150	145




FL COMP 60/80 V 70W						
* P [W]	70			55		
CCT [K]	3000	4000	6500	3000	4000	6500
** Ph_L_v [lm]	9800	10500	10100	7500	8200	8000
*** Eff. [lm/W]	140	150	145	140	150	145

FL COMP 125/150 V 105W						
* P [W]	105			90		
CCT [K]	3000	4000	6500	3000	4000	6500
** Ph_L_v [lm]	14200	15700	14700	12600	13500	13000
*** Eff. [lm/W]	135	150	140	140	150	145








FL COMP 165/200 V 135W						
* P [W]	135			120		
CCT [K]	3000	4000	6500	3000	4000	6500
** Ph_L_v [lm]	17500	20250	18900	16200	18000	16800
*** Eff. [lm/W]	130	150	140	135	150	140

FL COMP 200/250 V 178W						
* P [W]	178			150		
CCT [K]	3000	4000	6500	3000	4000	6500
** Ph_L_v [lm]	23100	25800	24000	20250	22500	21000
*** Eff. [lm/W]	130	145	135	135	150	140

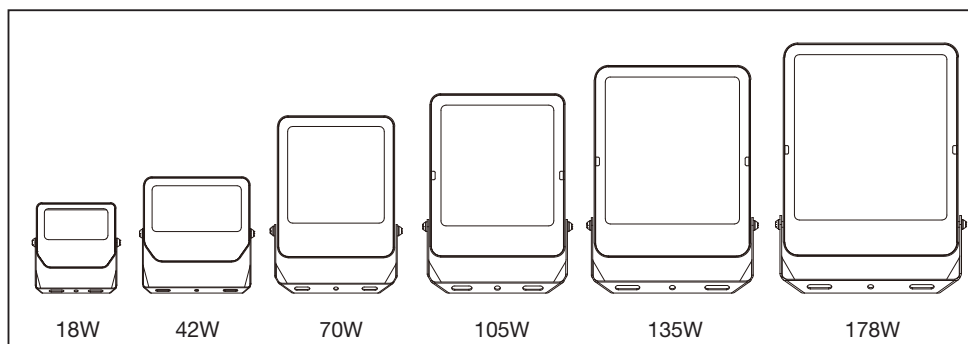


						230 Vac							
						A	B	C			C10A	B16A	C16A
18W						70	40	5.5	2x M5	0.010 m ²	76	96	123
42W						110	80	5.5	2x M5	0.018 m ²	20	26	33
70W						110	80	6.5	2x M6	0.033 m ²	17	22	28
105W						120	80	8.5	2x M8	0.044 m ²	17	22	27
135W						152	100	8.5	2x M8	0.060 m ²	13	21	21
178W						170	118	8.5	2x M8	0.074 m ²	15	19	25

FLOODLIGHT COMPACT GEN 2

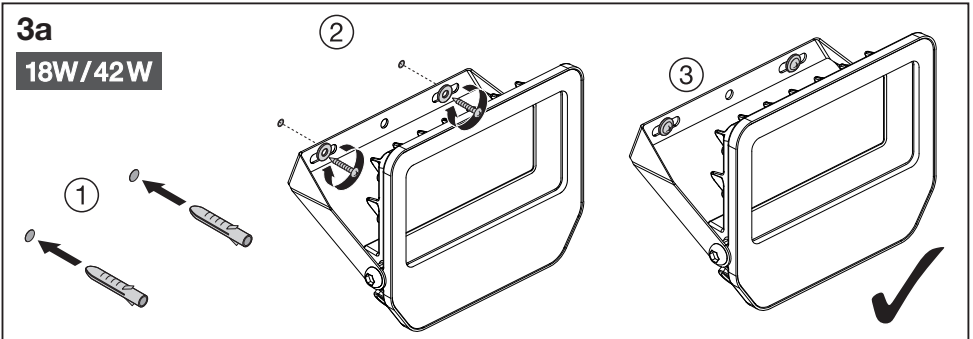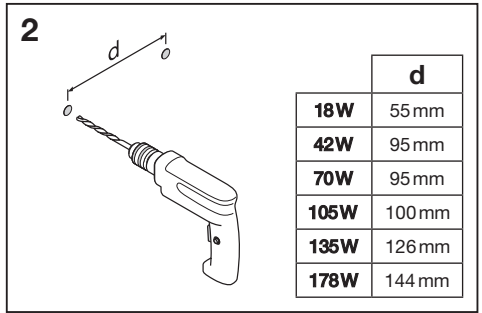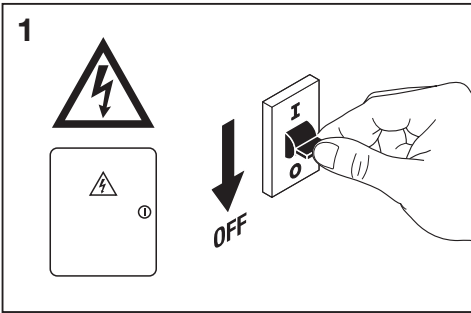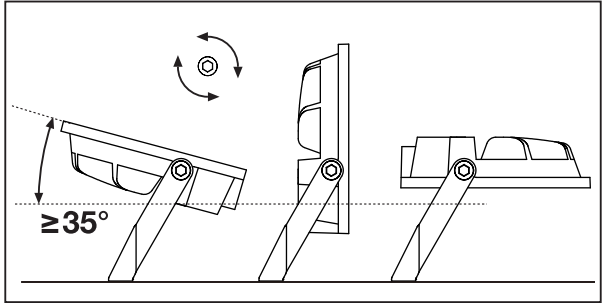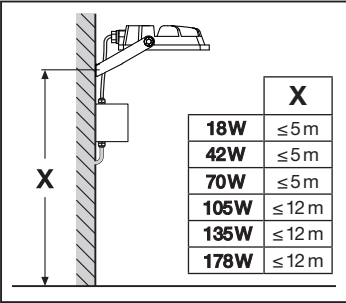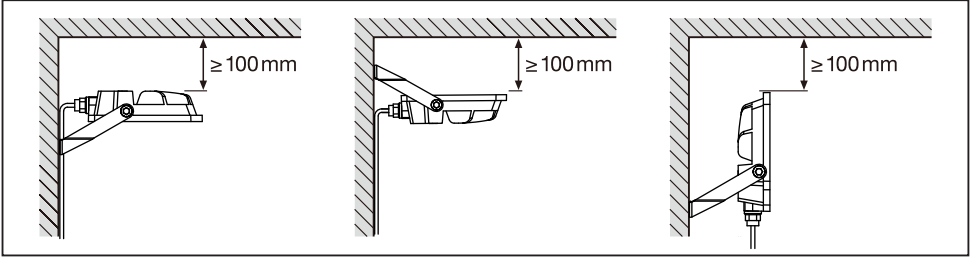

FLOODLIGHT COMPACT GEN 2



3b
70W/105W/135W/180W

⚠️ ⚠️

① ② ③

4

XNm

	X	
18W	2.4	M5
42W	2.4	M5
70W	3	M6
105W	9.6	M8
135W	9.6	M8
178W	9.6	M8

5

H05RN-F
 3x1.0mm²

8mm 34mm 48mm

IP65 L N

6

① ②

CCT Power
 WW
 NW
 CW

Default setting 1)

CCT Power
 WW
 NW
 CW

WW	3000K		
NW	4000K		
CW	6500K		

FL COMP 10/20 V 18W	9W / 1350lm	18W / 2400lm
FL COMP 30/50 V 42W	24W / 3600lm	42W / 6100lm
FL COMP 60/80 V 70W	55W / 8200lm	70W / 10500lm
FL COMP 125/150 V 105W	90W / 13500lm	105W / 15700lm
FL COMP 165/200 V 135W	120W / 18000lm	135W / 20250lm
FL COMP 200/250 V 178W	150W / 22500lm	178W / 25800lm

7

⚡

ON

