
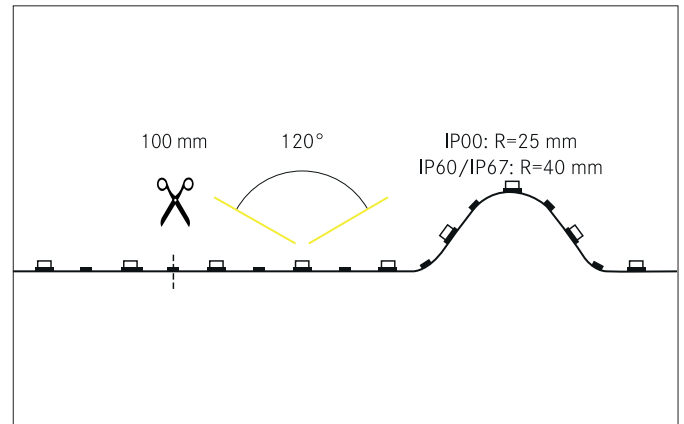


QUALITYFLEX Individual LED flex lighting Single RGB+TW, 5 m, 24 W / m, IP67
Article no. 18576002

Light.
For Generations.

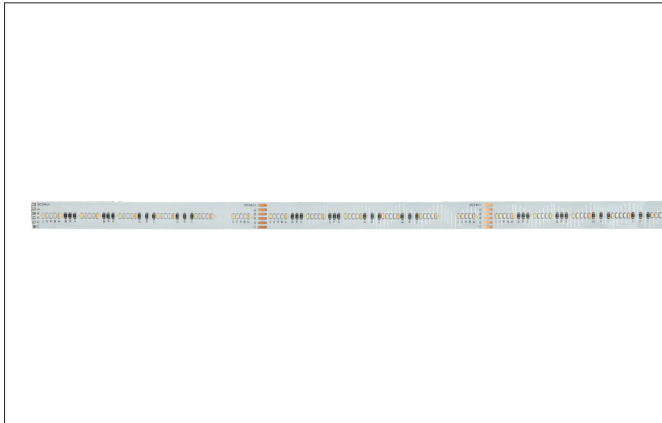

Tender

LED flex lighting Single RGB+TW, 5 m, 24 W / m, IP67, white, 5.700K-2.700K, CRI > 90. LED flex lighting decorative, technical as well as efficient lighting of light coves, linear applications and backlighting, basic or general lighting of rooms, architectural applications and for areas where high illumination is required, such as indirect or direct lighting, luminous ceilings, gastronomy lighting and much more. Length: 5000.0 mm Lamp power per meter: 24.0 W/m, Degree of protection: IP67, Protection class: III, Voltage: 24V DC, Beam angle: 120.0 °, 300 LEDs per meter, Chip distance (Short Pitch) : 16,5mm. For individual application, the LED flex board can be used all 100 mm be cut back. If the LED flex board is shortened, the IP protection must be restored by the customer. The maximum system length of 5.000mm must not be exceeded with one feed-in.

Product Benefits

- Dynamic colored light for accent and dynamic white light for lighting applications in one LED flex lighting.
- Unique LED chip design for clear lighting effects.
- Light colors: red / green / blue / cool white (5700 Kelvin) / warm white (2700 Kelvin).
- Suitable for indoor and outdoor applications (IP67).
- Divisible every 100 mm.
- Compatible with our 5-channel 24 V DC controllers, RGB+TW.

QUALITYFLEX Individual LED flex lighting Single RGB+TW, 5 m, 24 W / m, IP67

Article no. 18576002

 Light.
For Generations.

Article data	
Article no.	18576002
GTIN	4251433943228
Series name	QUALITYFLEX Individual
Short description	LED flex lighting Single RGB+TW, 5 m, 24 W / m, IP67
Colour	White
Length	5,000 mm
Width	14.5 mm
Hight	4.8 mm
Scope of delivery	incl. 1 x tube silicone 3 gram, 5 x end caps, 10 x plastic clamps, 20 x screws, 1 x mounting instruction, 5 x identification labels
Weight	0.495 kg
Length of the connection line	350 mm
Conformance	CE, UKCA

Lighting technology	
Colour temperature	RGB + TunableWhite
Light colour	RGB-TW
Color Temperature 1	2,700 K
Color Temperature 2	5,700 K
Luminous flux 1	400 lm/m
Luminous flux 2	367 lm/m
Luminous flux red	115 lm/m
Luminous flux green	322 lm/m
Luminous flux blue	72 lm/m
System efficiency	24 lm/W
McAdam-Step	McAdam-Step 3
Colour rendering	CRI > 90
Beam angle	120°
Adjustable color temperature	Infinite control

Operating technology of the luminaire	
System output	120 W
Lamp power per meter	24 W/m
Voltage type	DC
DC nominal voltage max	24 V
Lamp	LED
Protection class	III
Degree of protection	IP67
Ambient temperature	-10 °C up to +40 °C
Dimmable	Yes
Wire number	6
Control	Depending on driver
Length of the connection line	350 mm
Cable assignment	brown = + yellow = - white blue = - blue red = - red green = - green white = - warm white
Design of the connecting cable	both sides
Bulb change possible	No
Rated life time L70/B50 at 25 °C	52,000 h
Rated life time L80/B10 at 25 °C	30.000 h

QUALITYFLEX Individual LED flex lighting Single RGB+TW, 5 m, 24 W / m, IP67

Article no. 18576002

Light.
For Generations.

Operating technology of QualityFlex	
Power per meter	24 W/m
Short Pitch	16.5 mm
Number of lamps per meter	300 Qty
Length of individual sections	100 mm
Smallest bend radius	40 mm
Control	Negative (6-core)
Length	5,000 mm
Maximum module length	5,000 mm
Circuit type	Parallel conduction
LED Type	2110 LED

Packing data	
Gross weight	0.537 kg
Length of packaging	280 mm
Packaging width	260 mm
Packaging height	20 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>

Compatible Driver						
Article no.	Power min	Power	Control	Length	Width	Hight
17206000	1 W	20 W	1-10 V	146 mm	55 mm	19 mm
17207000	1 W	30 W	on/off	160 mm	50 mm	22 mm
17214000	1 W	7.2 W	on/off	68 mm	35 mm	21 mm
17223000	1 W	75 W	on/off	185 mm	60 mm	31 mm
17224000	1 W	100 W	on/off	199 mm	63 mm	36 mm
17225000	1 W	150 W	on/off	219 mm	63 mm	36 mm
17226000	1 W	240 W	on/off	244 mm	71 mm	38 mm
17240000			on/off			

Compatible Controller						
Article no.	Power min	Power	Control	Length	Width	Hight
18157000	1 W	240 W	ZigBee	145 mm	46.5 mm	16 mm
18190000	120 W	240 W	Wireless technology control	170 mm	59 mm	29 mm

Compatible Profiles				
Short description	Series name	Length	Width	Hight
Recessed profile 53654070	P36-20	2,000 mm	30 mm	20.4 mm
LED recessed profile 53759070	P40-30	2,000 mm	44.4 mm	24 mm
Plaster profile 53655070	P37-30	2,000 mm	63.4 mm	15.9 mm
Plaster profile 53656070	P38-30	2,000 mm	63.4 mm	24 mm
Surface-mounted profile 53602070	P04-14	2,000 mm	24 mm	9 mm
Surface-mounted profile 53603070	P06-20	2,000 mm	23 mm	25.1 mm
LED surface-mounted profile 53606070	P30-30	2,000 mm	33.4 mm	29.6 mm