
LED converter 700 mA, trailing-edge phase dimmable


Article no. 17748000



BRUMBERG

Light. For Generations.

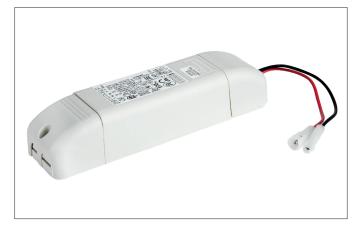





Tender

LED converter 700 mA, trailing-edge phase dimmable, white, Rectangular. This driver fulfills the requirements for safety lighting systems in accordance with DIN EN 50172 VDE 0108-100:2005-01. This converter is equipped with safety devices which protect it against overvoltage, short-circuit as well as thermal and electric overloads. The input and output terminals are suitable for cables with a cross-section of up to 1.5 mm². Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Current: 700 mA, Voltage: 230V AC 50Hz, Power: 32 W, Dimmable: Yes, Control: Trailing-edge phase.

Article data	
Article no.	17748000
GTIN	4251433924500
Short description	LED converter 700 mA, trailing-edge phase dimmable
Material	Plastic
Colour	White
Shape	Rectangular
Length	166 mm
Width	46 mm
Hight	34 mm
Scope of delivery	Plug&Play-Ausgangsleitung, Länge 110 mm
Weight	0.183 kg
stamp	ENEC 05, MM
Conformance	CE

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 22.10.2024 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

LED converter 700 mA, trailing-edge phase dimmable

Article no. 17748000

Light. For Generations.

BRUMBERG

Operating technology of driver	
AC nominal voltage min	198 V
AC nominal voltage max	264 V
Frequency min	50 Hz
Frequency max	60 Hz
Protection class	I
Degree of protection	IP20
Power min	1.4 W
Power	32 W
Output_ripple_current	3
Starting current	5A 50µs
Suitable for emergency lighting	No
measure point (tc)	75 °C
Version	Plug&Play
Power factor	0.97
Output voltage max	46.00 V
Output voltage min.	2.00 V
Control	Trailing-edge phase
Number of poles	2
Enviroment temprature (ta)	-25 °C up to +50 °C
Measure point (tc)	max. +75 °C
Output current	700 mA
Packing data	

Packing data	
Gross weight	0.246 kg
Length of packaging	140 mm
Packaging width	110 mm
Packaging hight	120 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you
	support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.