


SINDEE-S Ceiling recessed speaker, DA 68 mm
Article no. 43004070

Light.
For Generations.

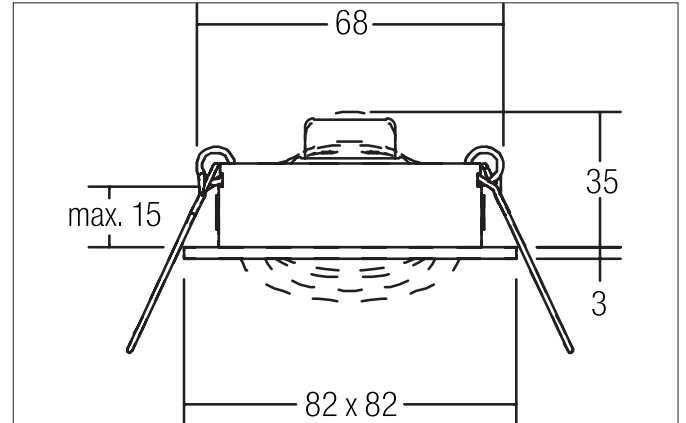

IP20

Tender

Ceiling recessed speaker, DA 68 mm, white, Square. In a compact design, for installation in tool-less rapid assembly systems. Nominal / music load capacity: 3 / 4 W, impedance: 20 Ohm. Up to 5 speakers can be connected in parallel to a channel of a HiFi amplifier. Sound pressure level: 1 W / 1 m: 82 dB (at nominal output of 87 dB), Transmission range (-3 db): 200 - 16,000 Hz, Transmission range (-10 db): 150 - 20,000 Hz, Net weight: 0.1 kg. Connection using 2-core cable with connecting terminals. Also available with cover in champagne matte or black on request. Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Steel, Degree of protection: according to DIN EN 60529 IP20, Adjustability: Pivoted, .

| Article data | |
|--------------------|------------------------------------|
| Article no. | 43004070 |
| GTIN | 4251433907046 |
| Series name | SINDEE-S |
| Short description | Ceiling recessed speaker, DA 68 mm |
| Material | Aluminium / Steel |
| Colour | White |
| Type of surface | Matt |
| Shape | Square |
| Built-in diameter | 68 mm |
| Installation depth | 35 mm |
| Length | 82 mm |
| Width | 82 mm |
| Height | 3 mm |
| Weight | 0.123 kg |
| Conformance | CE, UKCA |

SINDEE-S Ceiling recessed speaker, DA 68 mm

Article no. 43004070

Light.
For Generations.

| Packing data | |
|-------------------------|--|
| Gross weight | 0.17 kg |
| Length of packaging | 90 mm |
| Packaging width | 55 mm |
| Packaging height | 109 mm |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |