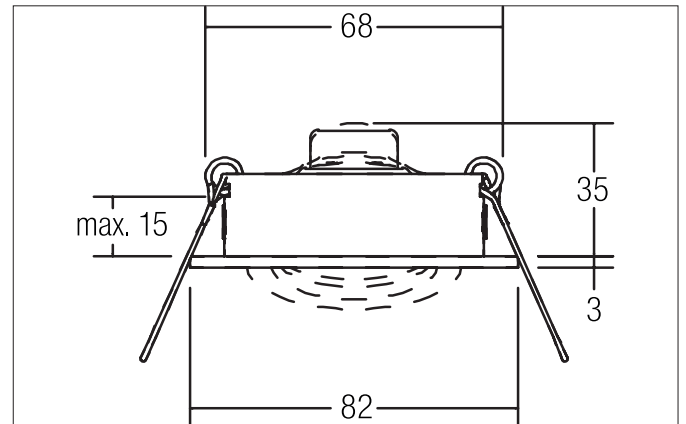


**Ceiling recessed speaker, DA 68 mm**

Article no. 43003640

Licht.  
Für Generationen.

IP20

**Tender**

Ceiling recessed speaker, DA 68 mm, titanium. In a compact design, for installation in tool-less rapid assembly systems. Nominal / music load capacity: 3 / 4 W, impedance: 20 Ohm. Up to 5 speakers can be connected in parallel to a channel of a Hifi amplifier. Sound pressure level: 1 W / 1 m: 82 dB (at nominal output of 87 dB), transmission range (-3 db): 200 - 16,000 Hz, transmission range (-10 db): 150 - 20,000 Hz, net weight: 0.1 kg. Connection using 2-core cable with connecting terminals. Also available with cover in champagne satin or black on request. Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Steel, Degree of protection: according to DIN EN 60529 IP20, Adjustability: Pivoted.

Article data	
Article no.	43003640
GTIN	4251433906995
Kurzbeschreibung	Ceiling recessed speaker, DA 68 mm
Material	Aluminium / Steel
Colour	Titanium
Type of surface	Matt
Outer diameter	82 mm
Built-in diameter	68 mm
Installation depth	35 mm
weight	0.113 kg

Packing data	
Gross weight	0.17 kg
Length of packaging	85 mm
Packaging width	43 mm
Packaging height	84 mm

Date 08.02.2022 All technical data as well as, weight and measurements are based on rated values and had been carefully prepared.

We reserve the right to make technical changes which are important in progressing. Product pictures are examples and can vary from the original.

Subject to errors.

Orders are placed under our general terms and conditions under <https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/>

**Ceiling recessed speaker, DA 68 mm**  
Article no. 43003640

Licht.  
Für Generationen.