


SINDEE-R Ceiling recessed speaker, DA 68 mm  
Article no. 43003640

Light.  
For Generations.

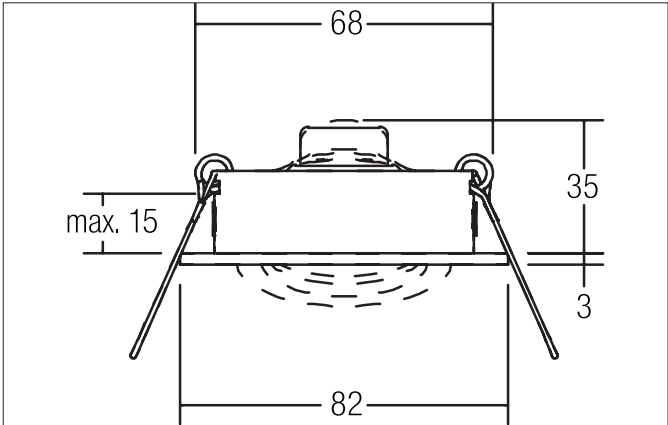

IP20

Tender	
Ceiling recessed speaker, DA 68 mm, titanium matt, Round. In a compact design, for installation in tool-less rapid assembly systems. Nominal / music load capacity: 3 / 4 W, impedance: 20 Ohm. Up to 5 speakers can be connected in parallel to a channel of a HiFi amplifier. Sound pressure level: 1 W / 1 m: 82 dB (at nominal output of 87 dB), transmission range (-3 db): 200 - 16,000 Hz, transmission range (-10 db): 150 - 20,000 Hz, net weight: 0.1 kg. Connection using 2-core cable with connecting terminals. Also available with cover in champagne satin or black on request. Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Steel, Degree of protection: according to DIN EN 60529 IP20, Adjustability: Pivoted.	

Article data	
Article no.	43003640
GTIN	4251433906995
Series name	SINDEE-R
Short description	Ceiling recessed speaker, DA 68 mm
Material	Aluminium / Steel
Colour	Titanium
Type of surface	Matt
Shape	Round
Outer diameter	82 mm
Built-in diameter	68 mm
Installation depth	35 mm
Height	3 mm
Weight	0.113 kg
Conformance	CE, UKCA

SINDEE-R Ceiling recessed speaker, DA 68 mm  
Article no. 43003640

Light.  
For Generations.

Packing data	
Gross weight	0.17 kg
Length of packaging	85 mm
Packaging width	43 mm
Packaging hight	84 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>