
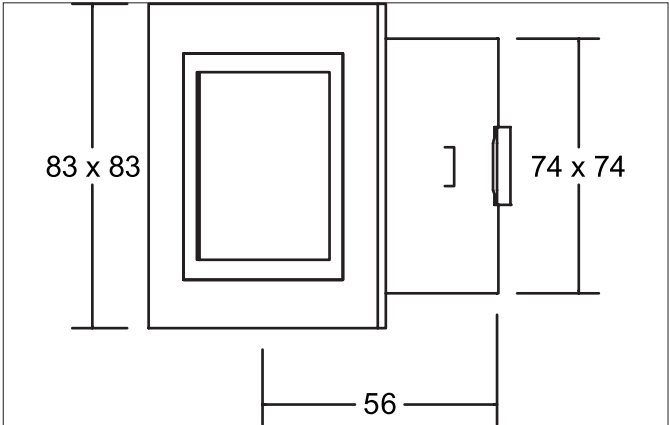


**ELEU LED wall recessed light**  
Article no. P3730R

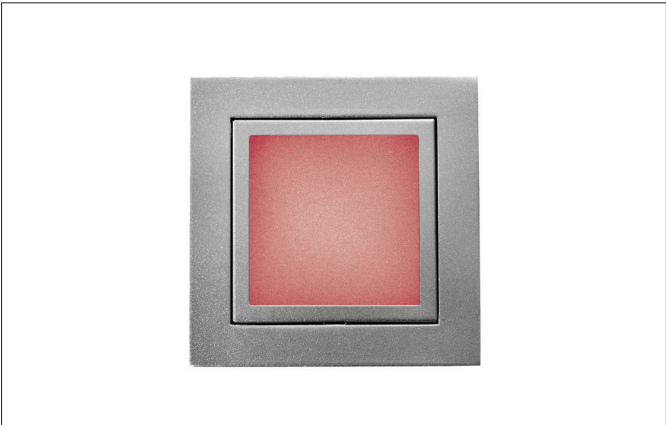

Tender	
LED wall recessed light, Square. Ceiling cut-out L x W 74 x 74 mm, Installation depth 56 mm, Weight 0,222 kg, with rotationssymmetrical, deep, wide distributed light intensity. Cover glass opal. Power 1 x 1,2 W, Colour rendering index CRI > 80, Housing material: Steel, Colour: Alu, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): III, Degree of protection (DIN EN 60529): IP20. For connection to an external driver, which is not included in the scope of delivery of the luminaire. Depending on driver dimmable.	

Article data	
Article no.	P3730R
GTIN	4250047729945
Series name	ELEU
Short description	LED wall recessed light
Material	Steel
Colour	Alu
Type of surface	Matt
Shape	Square
Built-in width	74 mm
Built-in length	74 mm
Installation depth	56 mm
Width	83 mm
Hight	3 mm
Weight	0.222 kg
Conformance	CE, UKCA

**ELEU LED wall recessed light**

Article no. P3730R

Lighting technology	
System efficiency	1 lm/W
Colour rendering	CRI > 80
Reflector	Without
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	1.2 W
Voltage type	DC
Current	350 mA
Lamp	LED
Lamp holder	Plug&Play
Protection class	III
Degree of protection	IP20
Dimmable	Depending on type of control gear
Control	Depending on driver
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Wall-mounted
Adjustability	Not adjustable
Further references	No cover with thermal insulation material
Material cover	Glass opal

Packing data	
Gross weight	0.272 kg
Length of packaging	115 mm
Packaging width	85 mm
Packaging height	85 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>

**ELEU LED wall recessed light**

Article no. P3730R

**Required accessories**

Article no.: 17666000

LED converter 350 mA, on/off switchable

Power: 1 - 5 W, Plug&amp;Play

Dimensions: 52 mm x 30 mm x 23 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17666000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17666000_2021_DE.pdf)

Article no.: 17662020

LED converter 350 mA, on/off switchable

Power: 1 - 7,2 W, Plug&amp;Play + Anschlussbox

Dimensions: 68 mm x 35 mm x 21 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17662020\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf)

Article no.: 17613000

LED converter 350 mA, on/off switchable

Power: 1 - 15 W, Plug&amp;Play

Dimensions: 115 mm x 34 mm x 19 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17613000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf)

Article no.: 17621020

LED converter 350 mA, on/off switchable

Power: 1 - 21 W, Plug&amp;Play + Anschlussbox

Dimensions: 128 mm x 50 mm x 13 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17621020\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf)

Article no.: 17648020

LED converter 350 mA, trailing-edge phase dimmable

Power: 0,7 - 17 W, Plug&amp;Play + Anschlussbox

Dimensions: 166 mm x 46 mm x 34 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17648020\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17648020_2021_DE.pdf)