
## BRUMBERG


## TRAXX MAXI LED surface mounted spot, DALI

Article no. 88843164DA

Light. For Generations.



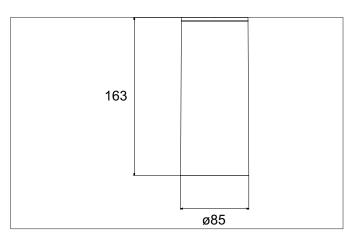

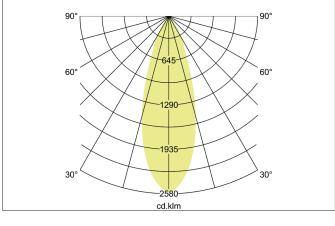



## Tender

LED surface mounted spot, DALI, Round.Luminaire diameter 85.0 mm, Hight 163.0 mm Weight 0.655 kg,Reflector silver with rotattionssymmetrical, deep, wide distributed light intensity. Cover glass transparent. Luminous flux 3.590 lm, Power 1 x 28 W, Light colour neutral white, Correlated color temprature (CCT) 4.000 K, Colour rendering index CRI > 90, Rated life time L80/B50 at 25 °C: 50.000 h, Housing material: Aluminium / Glass / Plastic, Colour: Silver structure, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP20. With electronic driver, DALI dimmable.

| Article data      |   |
|-------------------|---|
| Article no.       | 88843164DA  |
| GTIN              | 4251433984467   |
| Series name       | TRAXX MAXI  |
| Short description | LED surface mounted spot, DALI                            |
| Material          | Aluminium / Glass / Plastic                               |
| Colour            | Silver  |
| Type of surface   | Structure   |
| Shape             | Round   |
| Outer diameter    | 85 mm   |
| Hight             | 163 mm  |
| Scope of delivery | Incl. converter for connection to the 230-V mains voltage |
| Weight            | 0.655 kg  |
| Conformance       | CE, UKCA  |

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 10.12.2024 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

## TRAXX MAXI LED surface mounted spot, DALI

Article no. 88843164DA

Light. For Generations.

**BRUMBERG** 

| Lighting technology          |            |
|------------------------------|------------|
| Colour temperature           | 4.000 K    |
| Light colour                 | White      |
| Light output                 | Direct     |
| Luminous flux                | 3,590 lm   |
| System efficiency            | 128 lm/W   |
| Colour rendering             | CRI > 90   |
| Reflector                    | High-gloss |
| Reflector colour             | silver     |
| Beam angle                   | 30°        |
| Light sharing                | Symmetric  |
| Adjustable color temperature | No         |

| Operating technology of the luminaire |  |
|---------------------------------------|--|
| System output                         | 28 W   |
| Voltage type                          | AC   |
| AC nominal voltage max                | 230 V  |
| Frequency max                         | 50 Hz  |
| Lamp                                  | LED  |
| Lamp holder                           | Without fitting  |
| Protection class                      |  |
| Degree of protection                  | IP20   |
| Dimmable                              | Yes  |
| Control                               | DALI   |
| Rulh change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service |
| Bulb change possible                  | technician commissioned by him or a similarly qualified person.                          |
| Rated life time L80/B50 at 25 °C      | 50.000 h   |

| Mounting technology         |                   |
|-----------------------------|-------------------|
| Mounting method             | Surface mounting  |
| Place of installation       | Ceiling-mounted   |
| Adjustability               | Not adjustable    |
| Material cover              | Glass transparent |
| Suitable for through-wiring | No                |

| Packing data            |   |
|-------------------------|---|
| Gross weight            | 0.718 kg  |
| Length of packaging     | 170 mm  |
| Packaging width         | 170 mm  |
| Packaging hight         | 110 mm  |
|                         | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.   |
| Disposal at end of life | By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that |
|                         | harmful substances get into the environment.  |

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 10.12.2024 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/