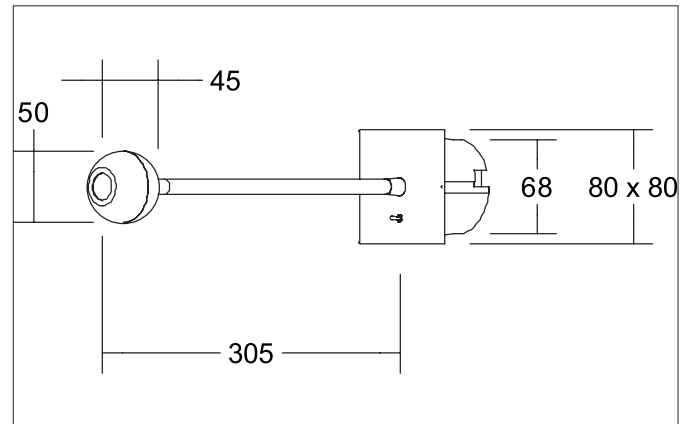


ARCUS LED recessed reading light ARCUS, for device socket, with ball head

Article no. 10181823

Light.
For Generations.**Tender**

LED recessed reading light ARCUS, for device socket, with ball head, Square. Ceiling cut-out \varnothing 68 mm, Installation depth 65 mm, Length 80 mm, Width 80 mm, Weight 0,388 kg, with rotationssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a glass transparent cover. Luminous flux 320 lm, Power 1 x 3,2 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 80, Housing material: Aluminium / Steel, Colour: Black / Chrome, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP20, .With electronic driver, on/off switchable.

Article data	
Article no.	10181823
GTIN	4251433932901
Series name	ARCUS
Short description	LED recessed reading light ARCUS, for device socket, with ball head
Material	Aluminium / Steel
Colour	Black / Chrome
Shape	Square
Built-in diameter	68 mm
Installation depth	65 mm
Length	80 mm
Width	80 mm
Scope of delivery	Incl. converter for connection to the 230-V mains voltage, on/off switchable
Weight	0.388 kg
Conformance	CE, UKCA

ARCUS LED recessed reading light ARCUS, for device socket, with ball head

Article no. 10181823

Light.
For Generations.

Lighting technology	
Colour temperature	3.000 K
Light colour	White
Light output	Direct
Luminous flux	320 lm
System efficiency	76 lm/W
Colour rendering	CRI > 80
Reflector	High-gloss
Beam angle	44°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	4.2 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	I
Degree of protection	IP20
Dimmable	No
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Wall-mounted
Adjustability	Head adjustable
Material cover	Glass transparent

Packing data	
Gross weight	0.494 kg
Length of packaging	375 mm
Packaging width	86 mm
Packaging height	86 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.